

BEAM INSTALLATION GUIDE



 FLOOR

WHAT'S IN THE BOX

Thank you for purchasing your new BEAM. Here's what's included:

1

The BEAM system



2

Power cord



3

The BEAM keyboard
for operating the system menus



4

Remote controller
for controlling the BEAM projector



BEFORE INSTALLING

Before starting the installation and setup, please make sure that:


1

Full **batteries** are equipped in both the keyboard and remote controller.




2

The **yellow safety ribbon** is pulled out of the batteries compartment.

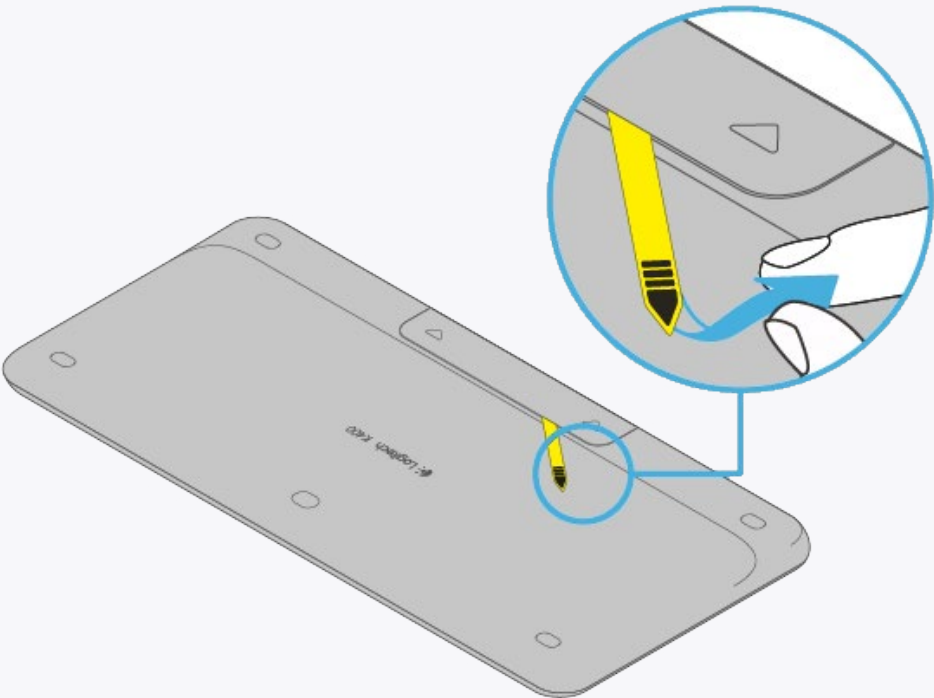

3

The keyboard's **toggle** on the is on and its green background is visible.

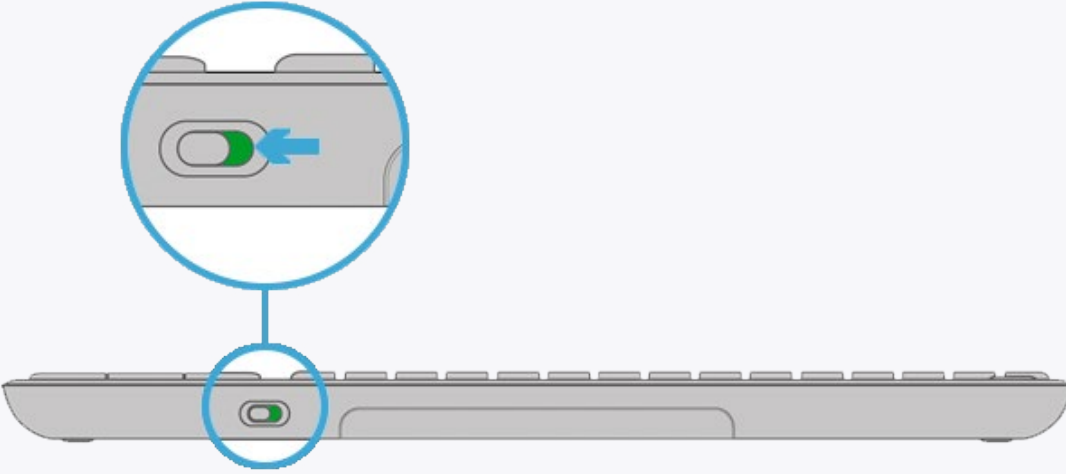

BEFORE INSTALLING

In order to hang your BEAM from the ceiling, please prepare:



**4 TURNBUCKLES
HOOK/EYE**



**4 CONCRETE EYE BOLT
ANCHORS**



4 CHAINS
See chart on slide 6 to
determin required length



4 CARABINER CLIPS


Note

Please prepare a **measuring tool**, a **marker**, a **drill**, a pair of **pliers** and a **leveler** for the installation process itself.

An **internet connection** is required to complete the device setup.


TECHNICAL SPECIFICATIONS

The BEAM device dimentions and measurments in **milimeters**:

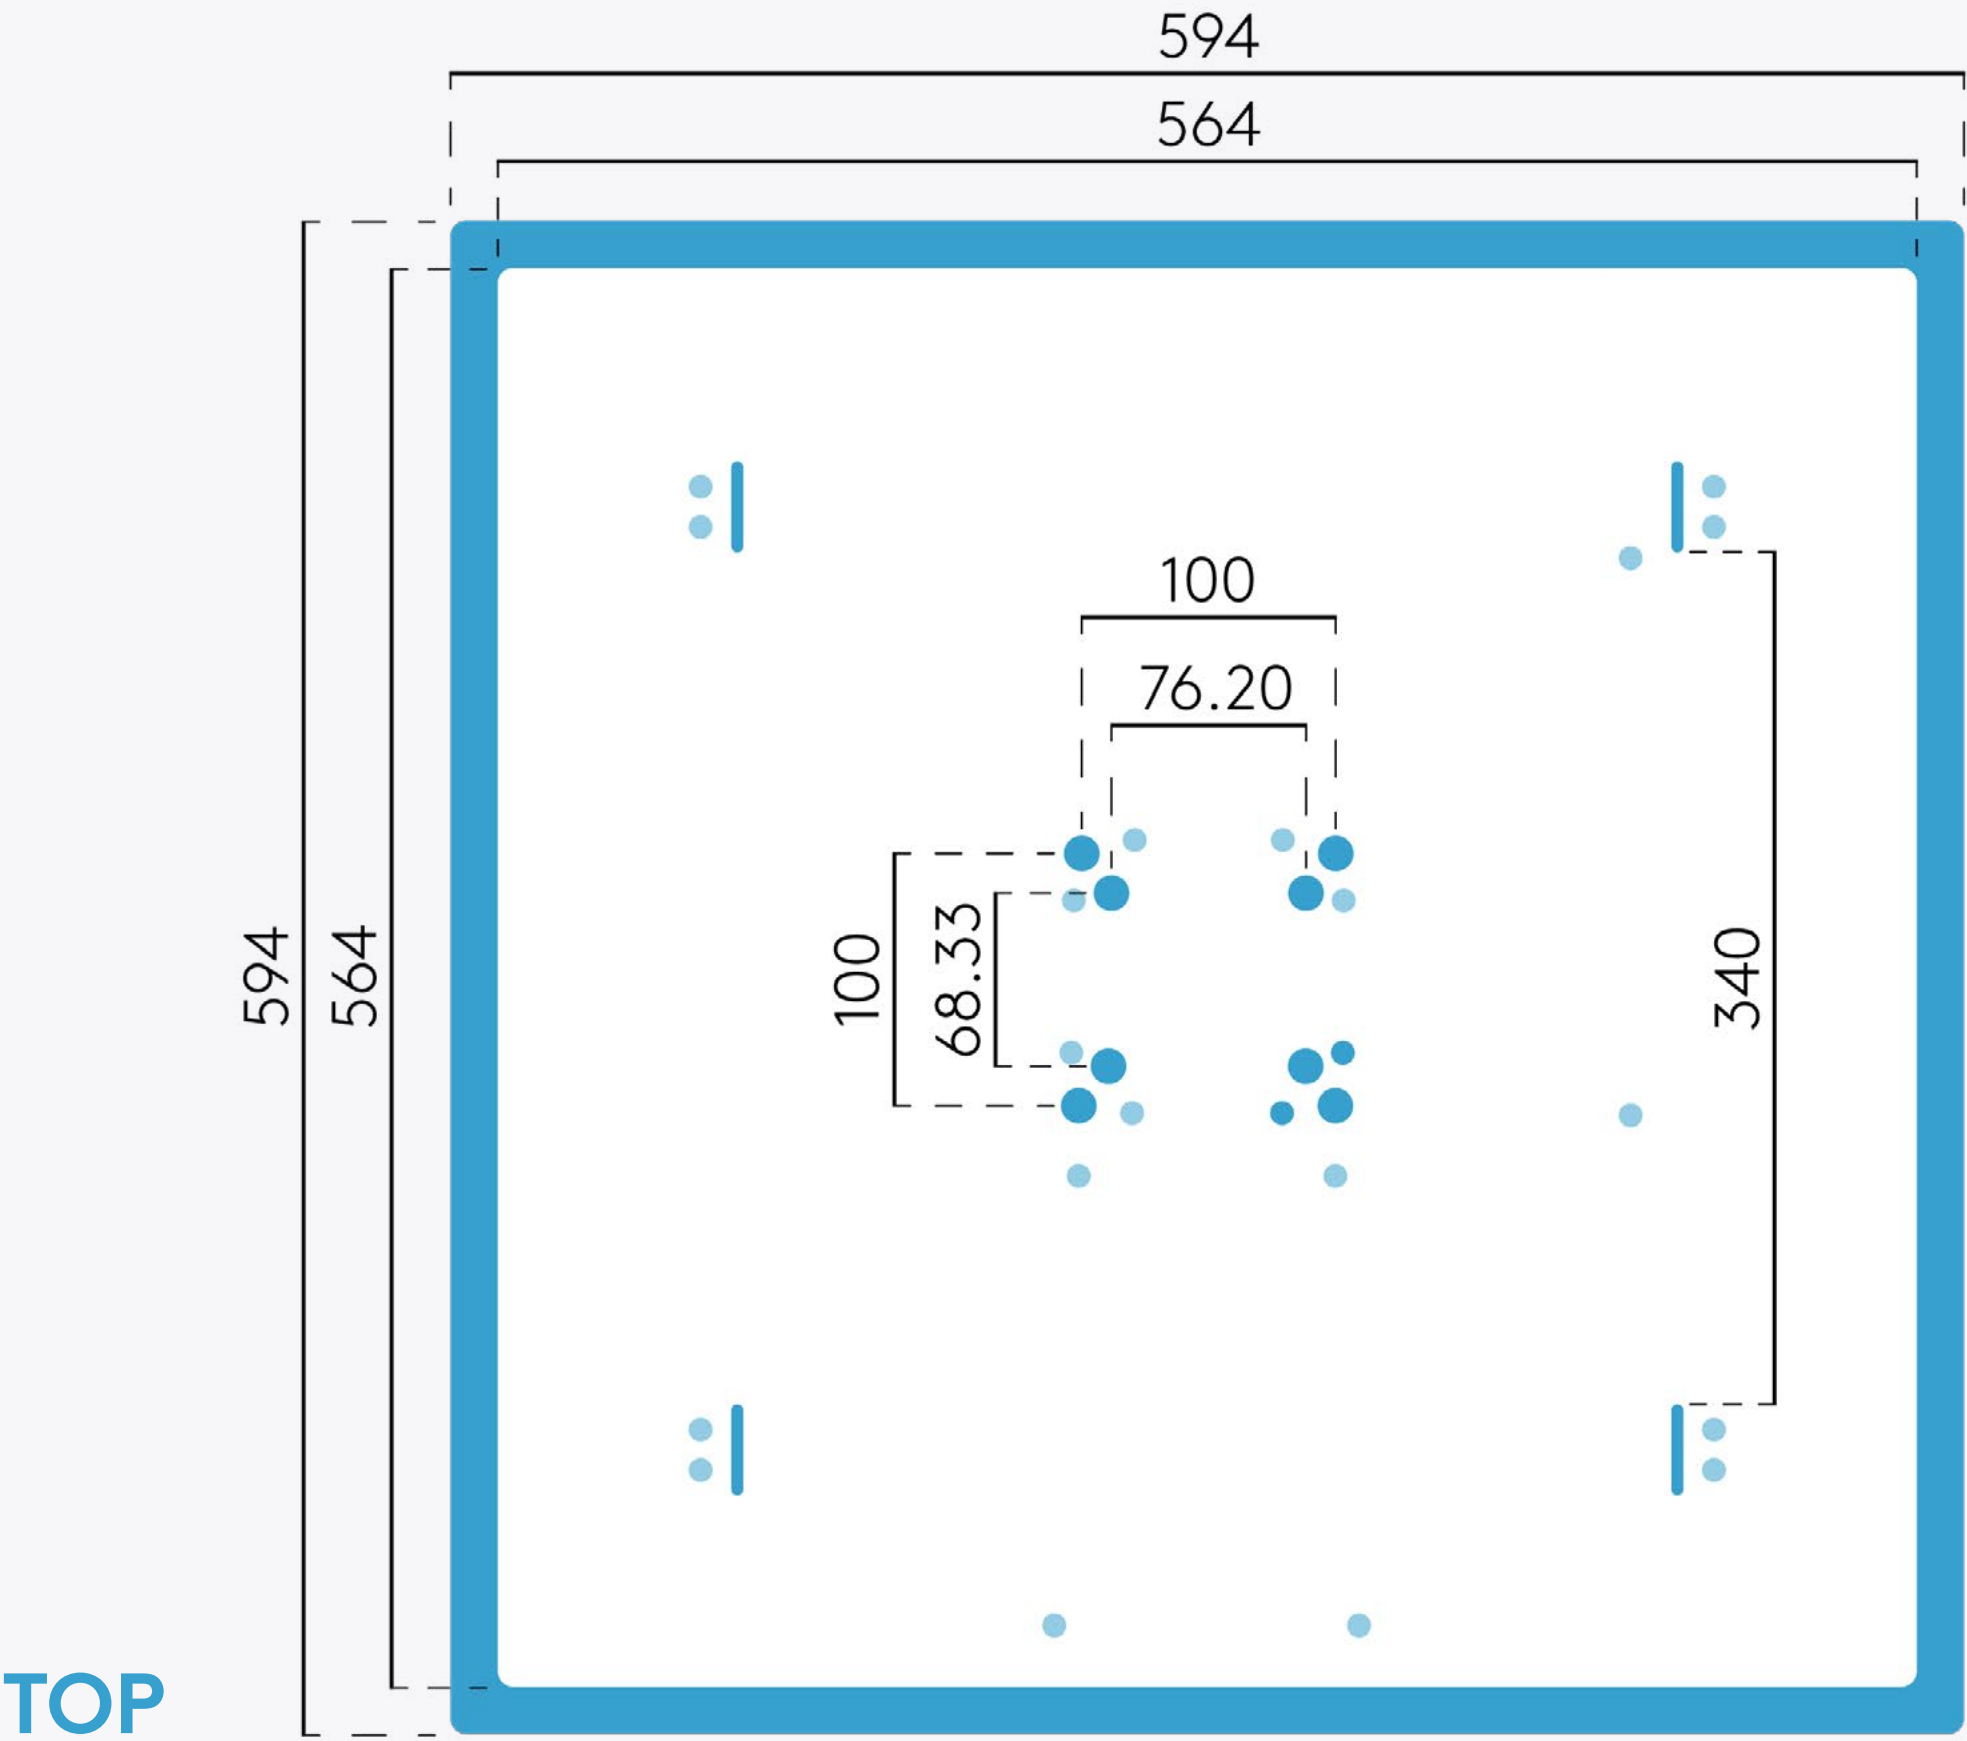


TOP

BACK

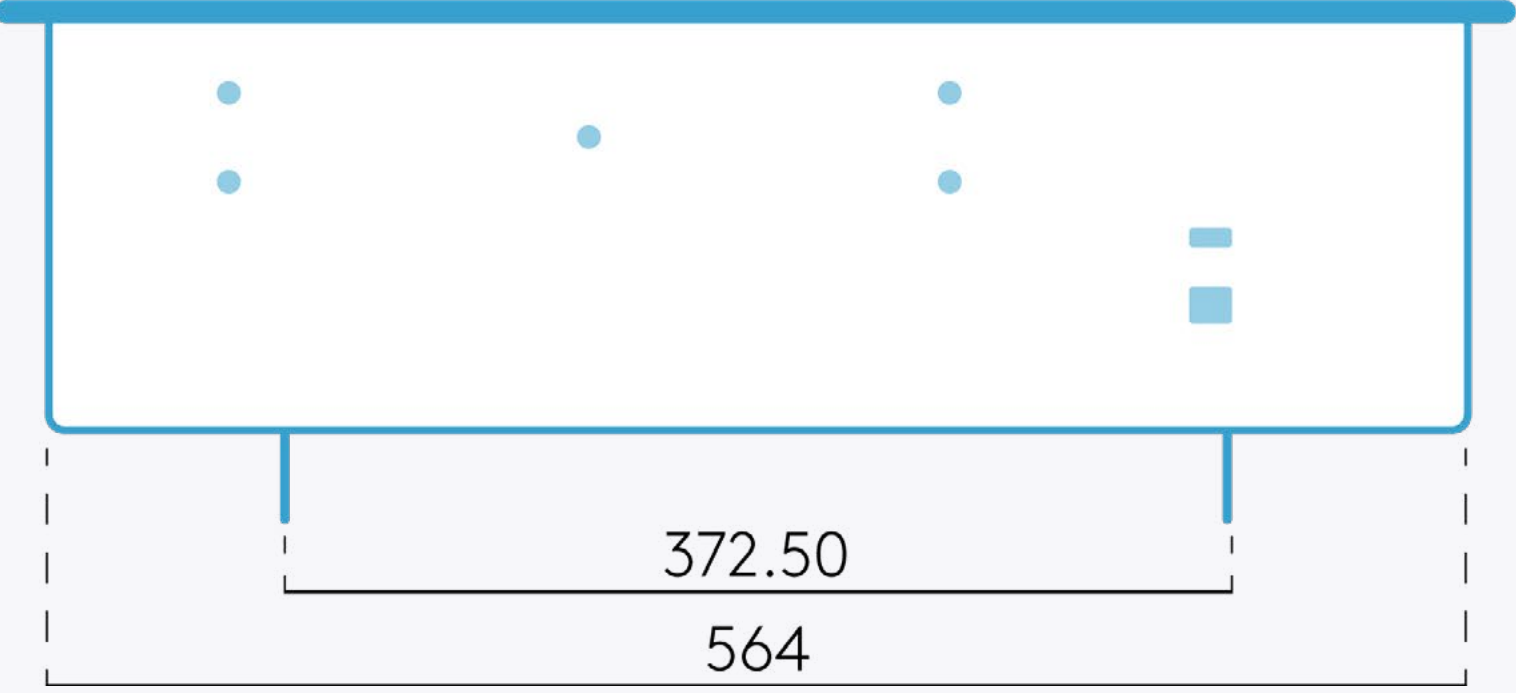

LEFT

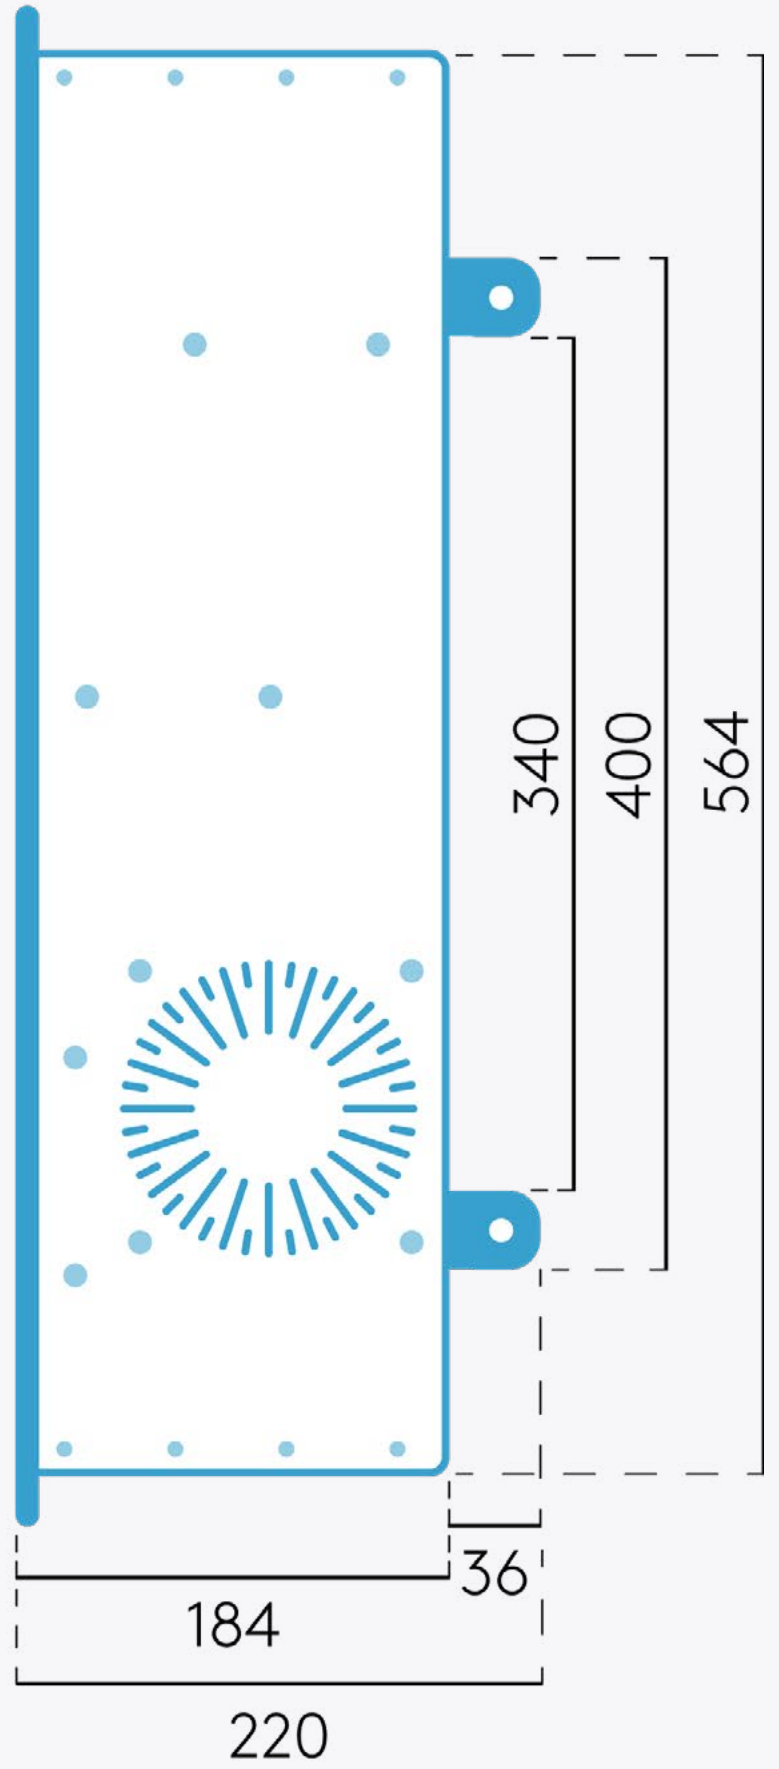

WHERE TO INSTALL



Use this table to determine if the installation location can accommodate the desired projection size.

All measurements are in **centimeters**.

PROJECTION SURFACE	MINIMUM ZOOM		MAXIMUM ZOOM	
	Width	Height	Width	Height
Distance from surface to device				
250	141	88	229	143
270	153	95	248	155
285	161	101	262	163
300	170	106	275	172
325	184	115	298	186
350	198	124	321	201
370	209	131	339	212
385	218	136	353	221
400	226	141	367	229
410	232	145	376	235
425	240	150	390	244

Note

Mounting the device more than **425 centimeters** above the projection surface may produce **false interactions** and **sensor inaccuracies**.

INSTALLING BEAM

1

Unpack the device and place it **face down** on a soft surface such as a carpet.




2

Attach each of the **carabiner clips** to the four **ear loops** on the top panel. Next, connect the **turnbuckles** to the carabiner clips.



3

Each end of the turnbuckles should be screwed to its **middle** to allow for **maximum adjustment range**.

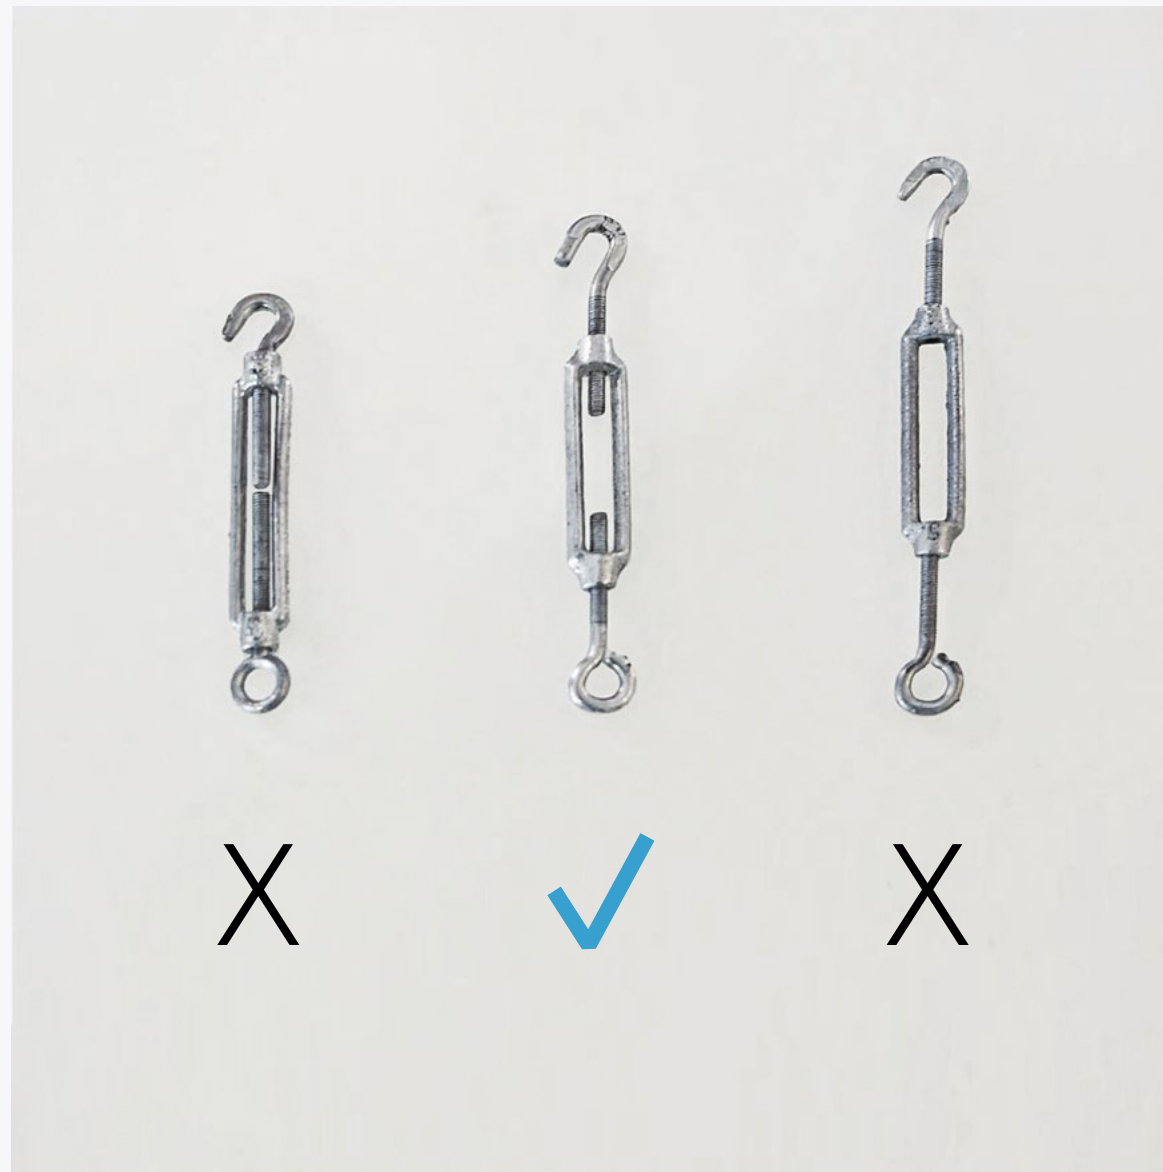

INSTALLING BEAM


4

Locate the **center of the projection area** - the device will be installed directly above it. Measure **a square** on the ceiling above the center of the projection area. The square must be at least **60 centimeters (24 inches)** in length and width. **Mark** the square's **corners**.


!

In order to leave sufficient space for the projection area, keep a distance of at least **100 centimeters** between the **marked square** (where you intend to install the device) and **any nearby walls**.

PROJECTION AREA

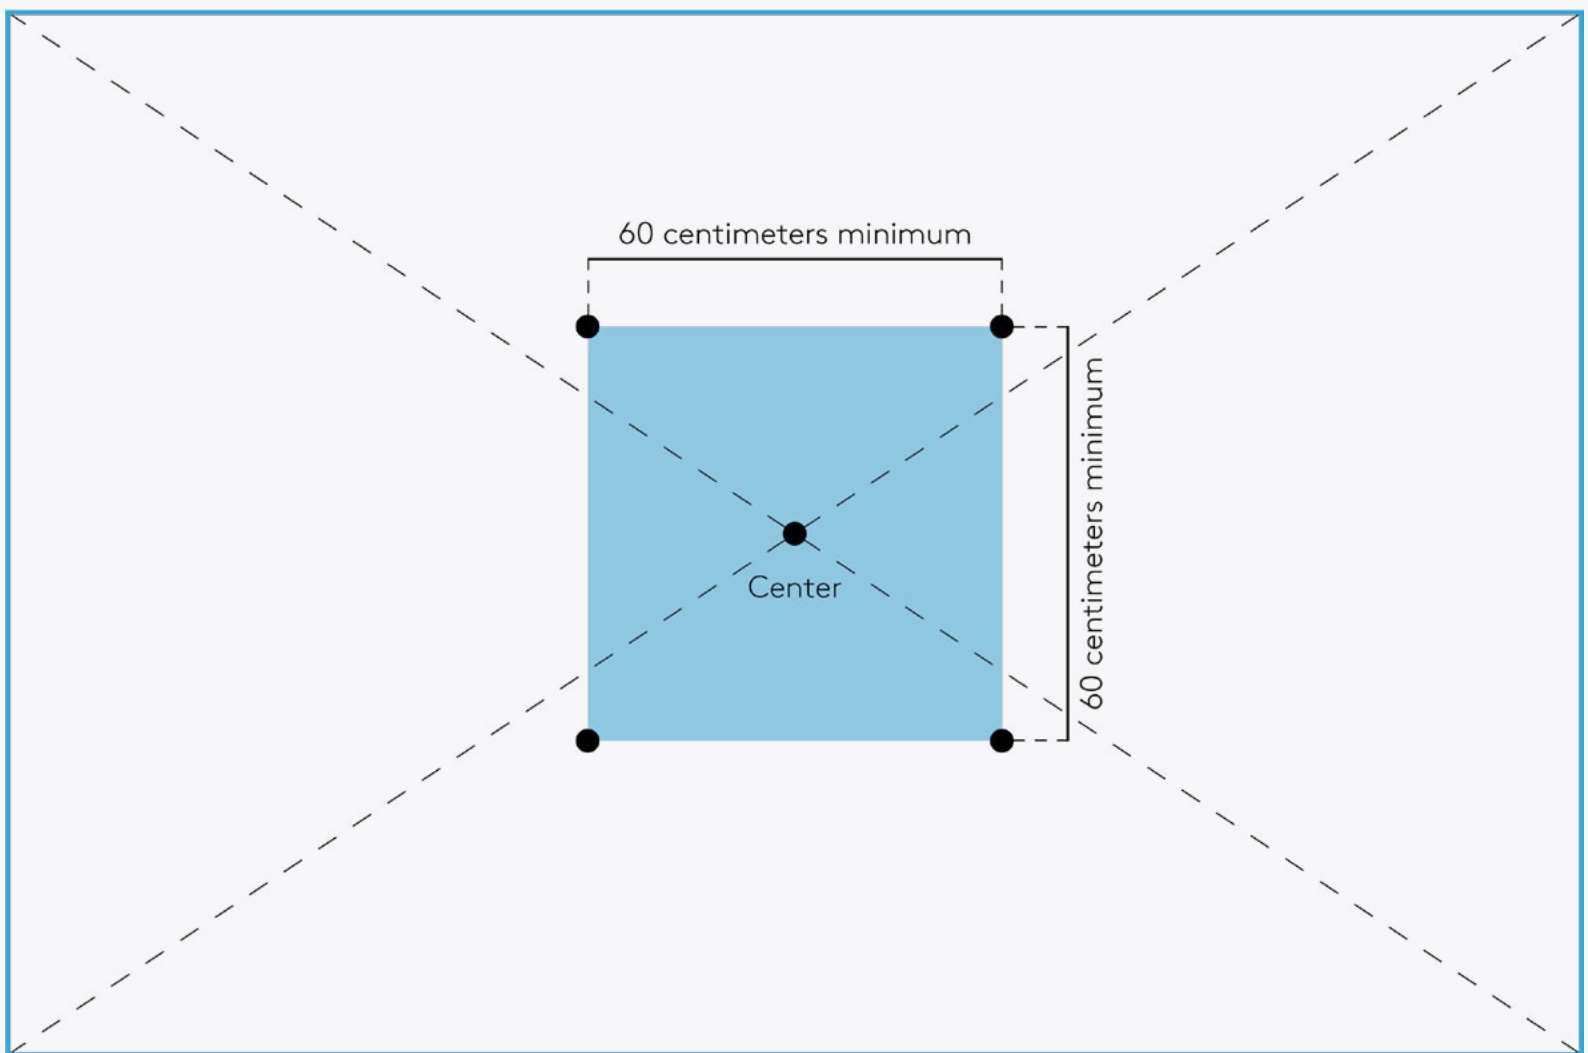

DISTANCE FROM WALLS

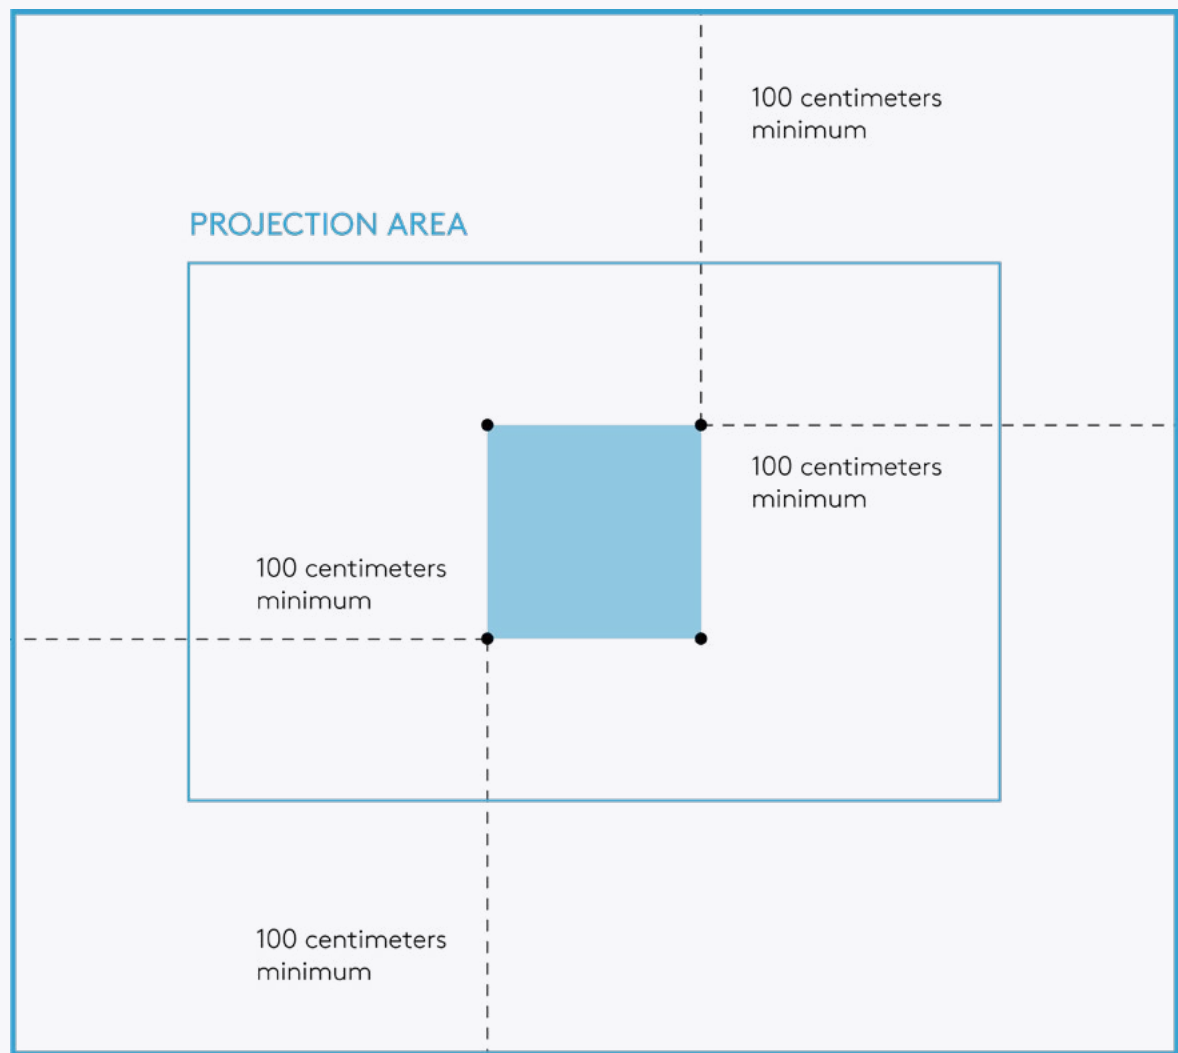

INSTALLING BEAM

5

Drill holes at of the square's marked corners. Make sure the drilled holes **depth** and **diamater** match the measurments of your **eye bolt anchors**. Insert an **eye bolt anchor** to each one of the drilled holes.

Fasten the bolts in place.



INSTALLING BEAM


6

Mount the device by attaching one end of each **chain** to each of the **hook bolt anchors**, and the other end to the **turnbuckles** connected to the device's top panel.



7

Place the **leveler** on the device and adjust the **turnbuckles** until the device is **completely levelled**.

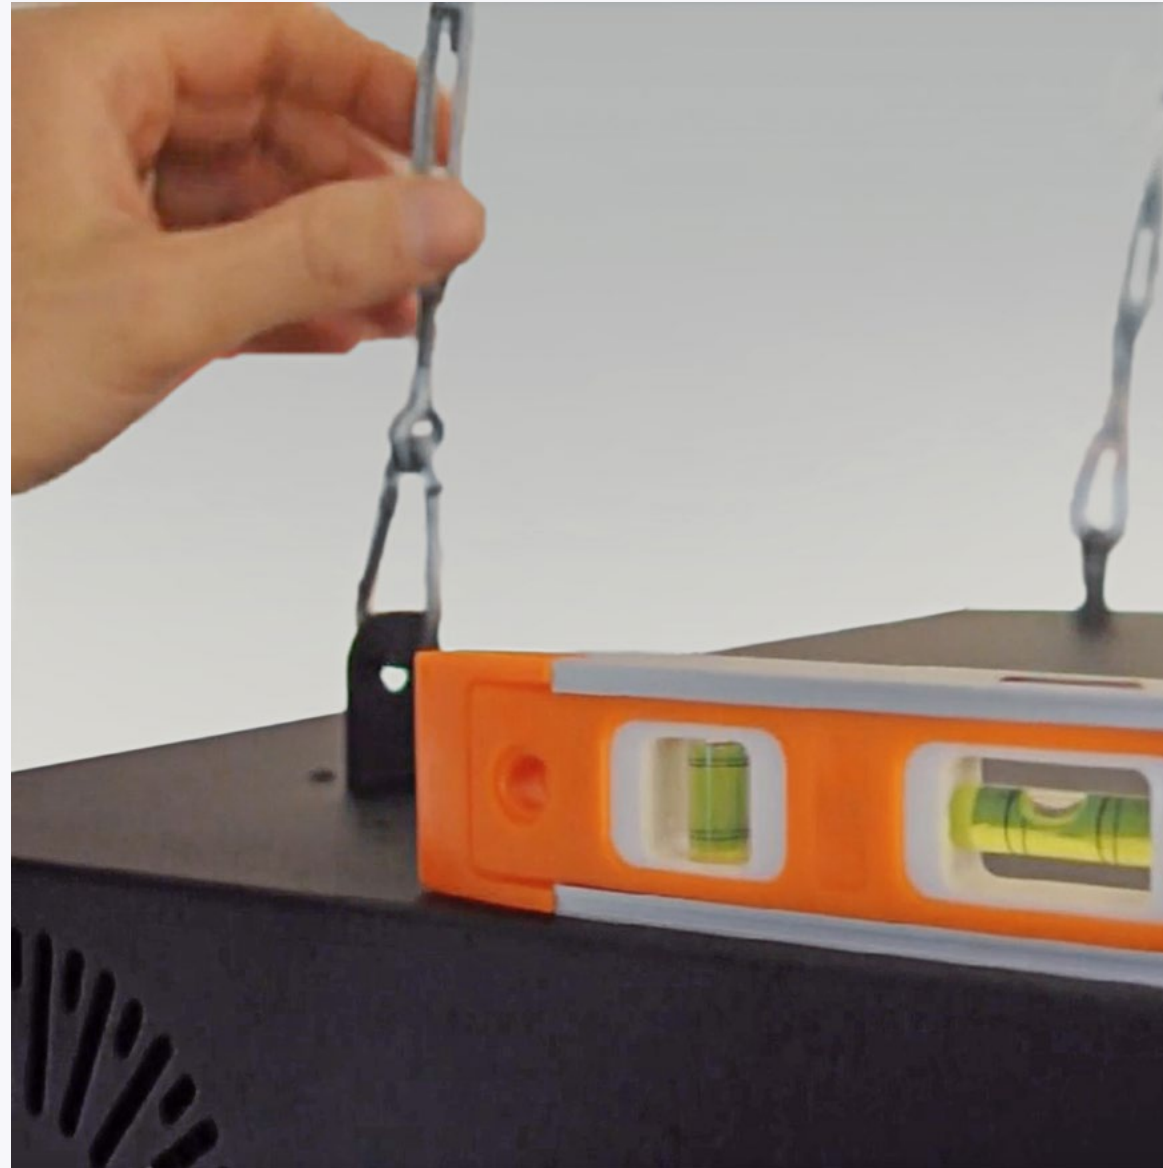

INSTALLING BEAM

8

Connect the device to a **15A 110-240V** dedicated, stable **power outlet**. The power socket is located on the device's front panel.



9

Connect the device to your **router** using an **Ethernet cable**. The internet port is located on the device's back panel.

It is also possible to connect to a **WiFi network** during the device setup.



10

Turn on the projector using the **remote controller**. Allow up to **10 minutes** for the projector's initial activation.




DROP (FALSE) CEILING INSTALLATION



To install BEAM in a location with a drop (false) ceiling, anchor the device to the true ceiling or a support beam as previously explained. Use the drop ceiling's frame to level the device.

Make sure the device's weight is fully supported by the chains attached to the true ceiling or a support beam - the drop ceiling's frame shouldn't carry the device's weight.

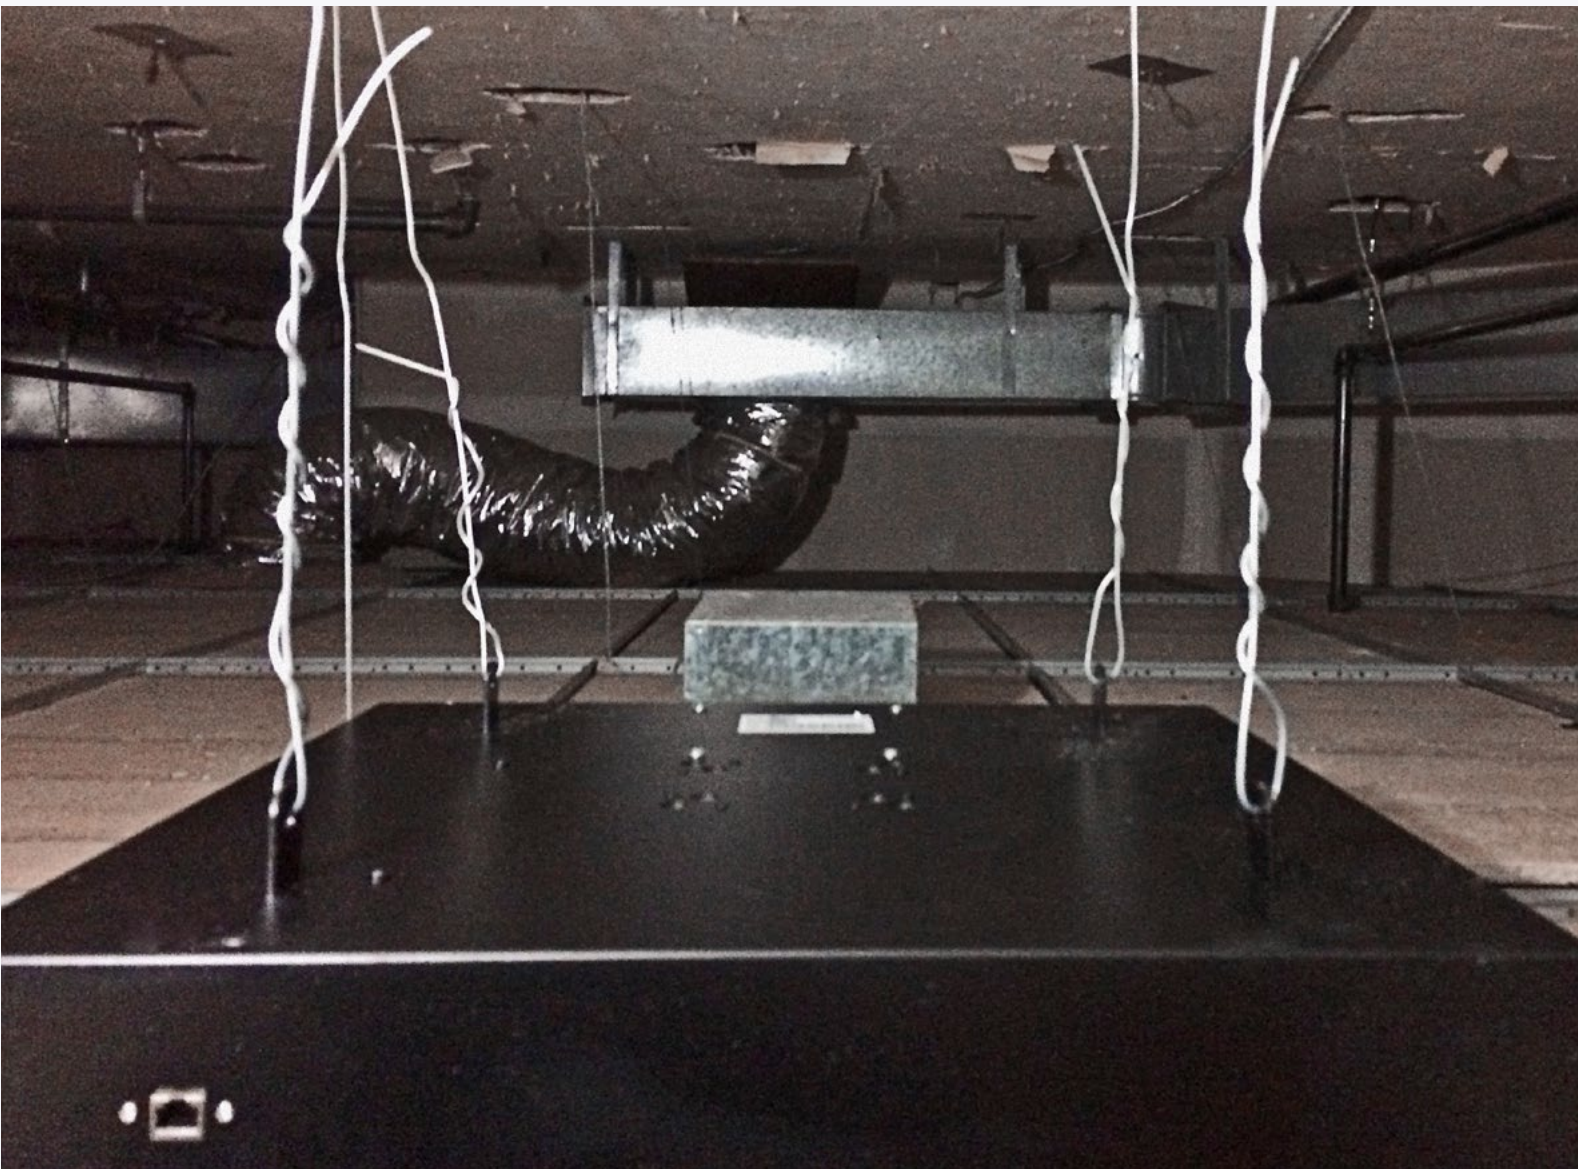



INSTALLING BEAM



Alternatively, you can use a **pole** for an **open ceiling installation**. Simply connect the pole to the device's **top panel**.



TOP PANEL POLE MOUNT

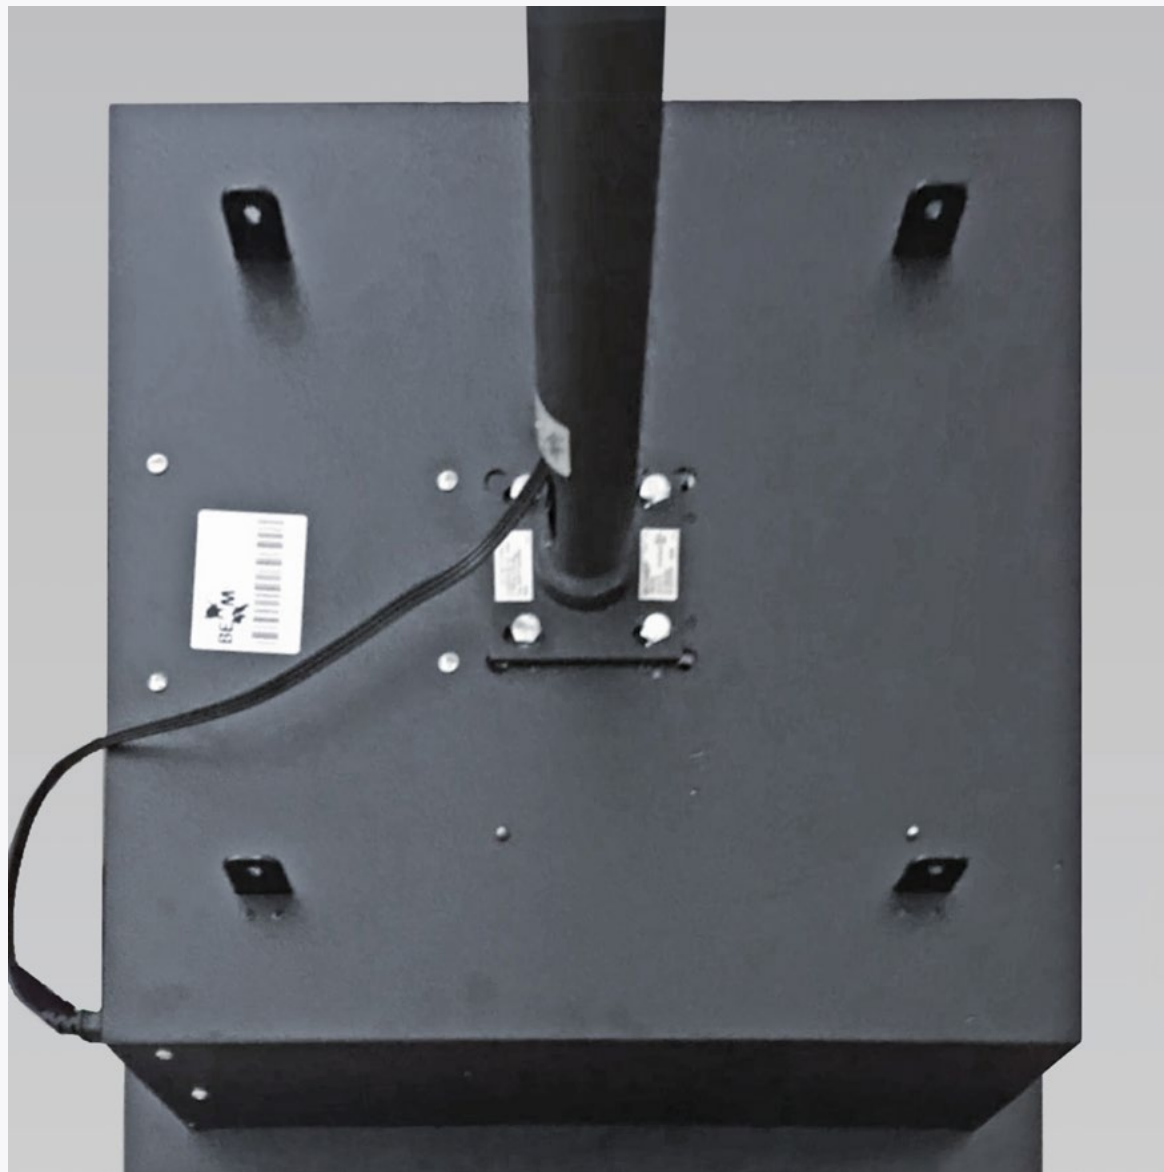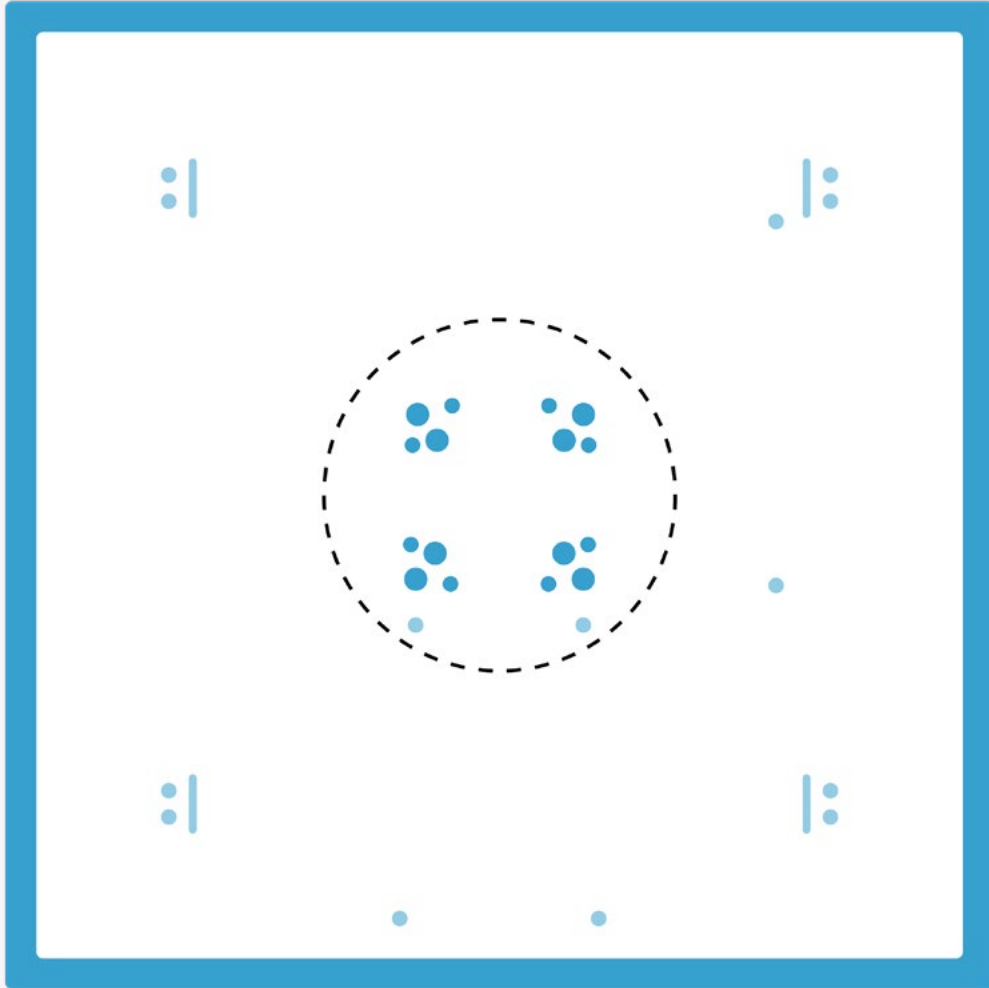

If you're installing the device to a **metal ceiling**, use suitable hook bolt anchors for metal surfaces.



SETTING UP YOUR BEAM



Once the projector is fully activated, use the projector's **zoom** and **focus** wheels to adjust the image.




If needed, it's possible to slightly adjust the projection position after installing the device.

Release the **mirror's Hex** and gently nudge it to **tilt** the projection back or forth.



If the projection is **skewed**, straighten it by clicking the **menu** button on your projection **remote**, then **Settings**, and select to adjust the **Keystones**.

Note that after adjusting keystones, the projection must be **calibrated** (calibration is available in the Settings section in the control area).

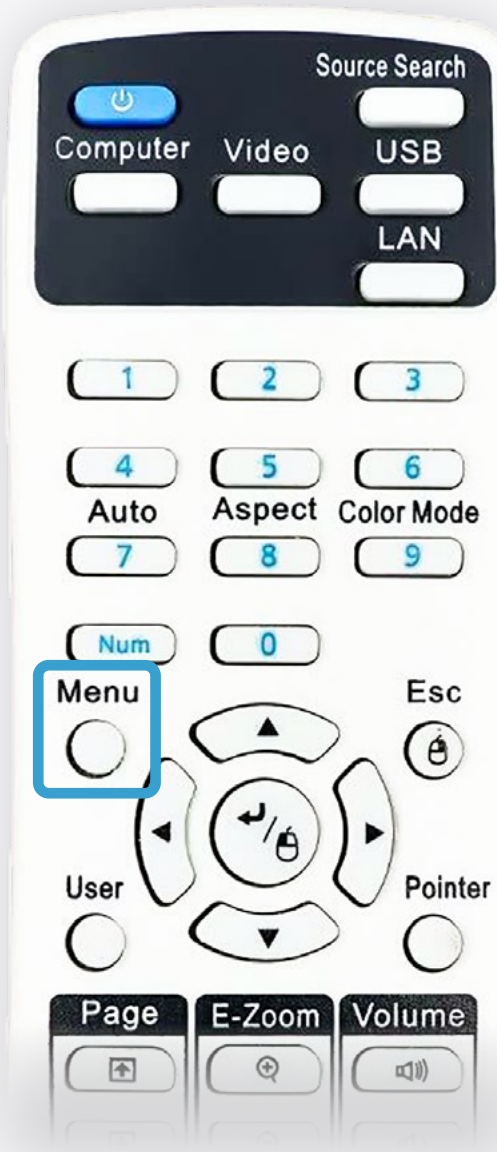

SIGN IN & CONFIGURATION

After finishing the initial projection setup and turning on your device, the login screen will be displayed.

1 CONNECT TO INTERNET


If the device is not connected through an Ethernet cable, select the WI-FI button and select an available network to connect to.

2 ENTER CREDENTIALS

Note that these are case-sensitive.
Username: eyeclick
Password: Qwerty!#
The device's **serial number** is listed on the sticker on the back of the keyboard.

3 LOGIN

Select the login button to continue.

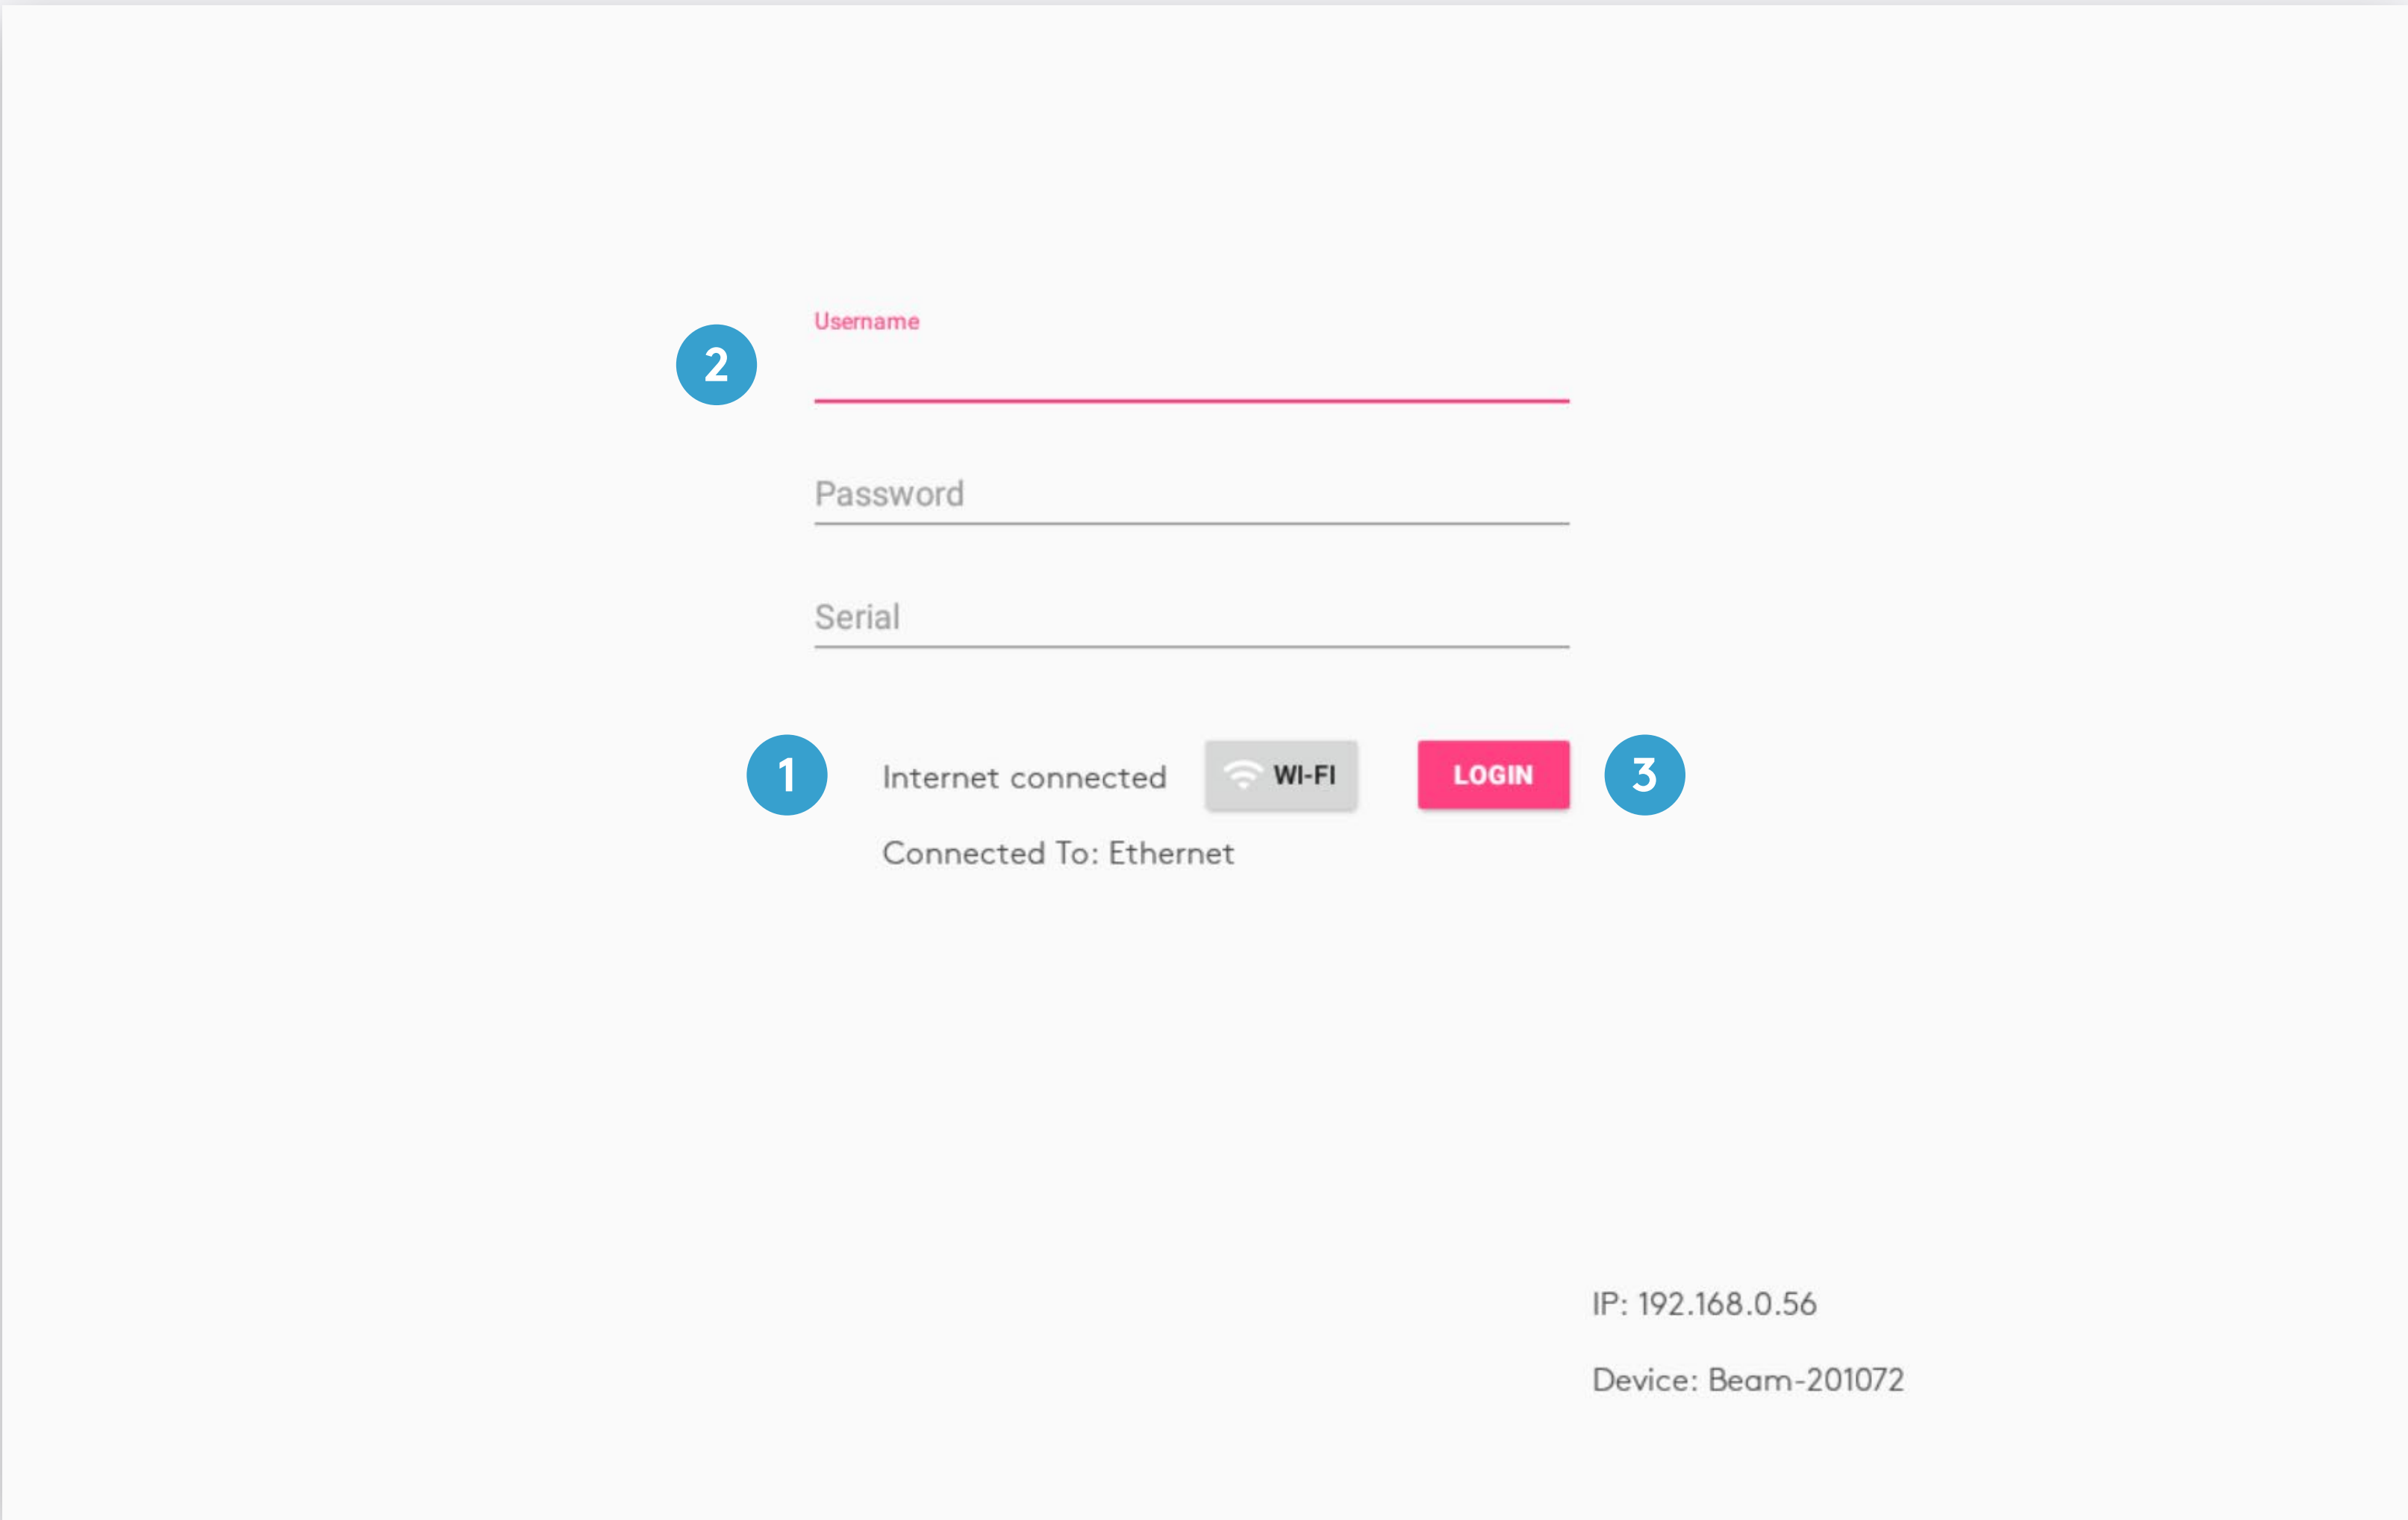

SIGN IN & CONFIGURATION


4

Once you've logged in, the device will start **downloading updates**. This step may take up to **20 minutes**. The device might restart automatically during this stage.




5

Once the device has been updated and is ready, the progress slider will be replaced by a text: "**Not in schedule**".

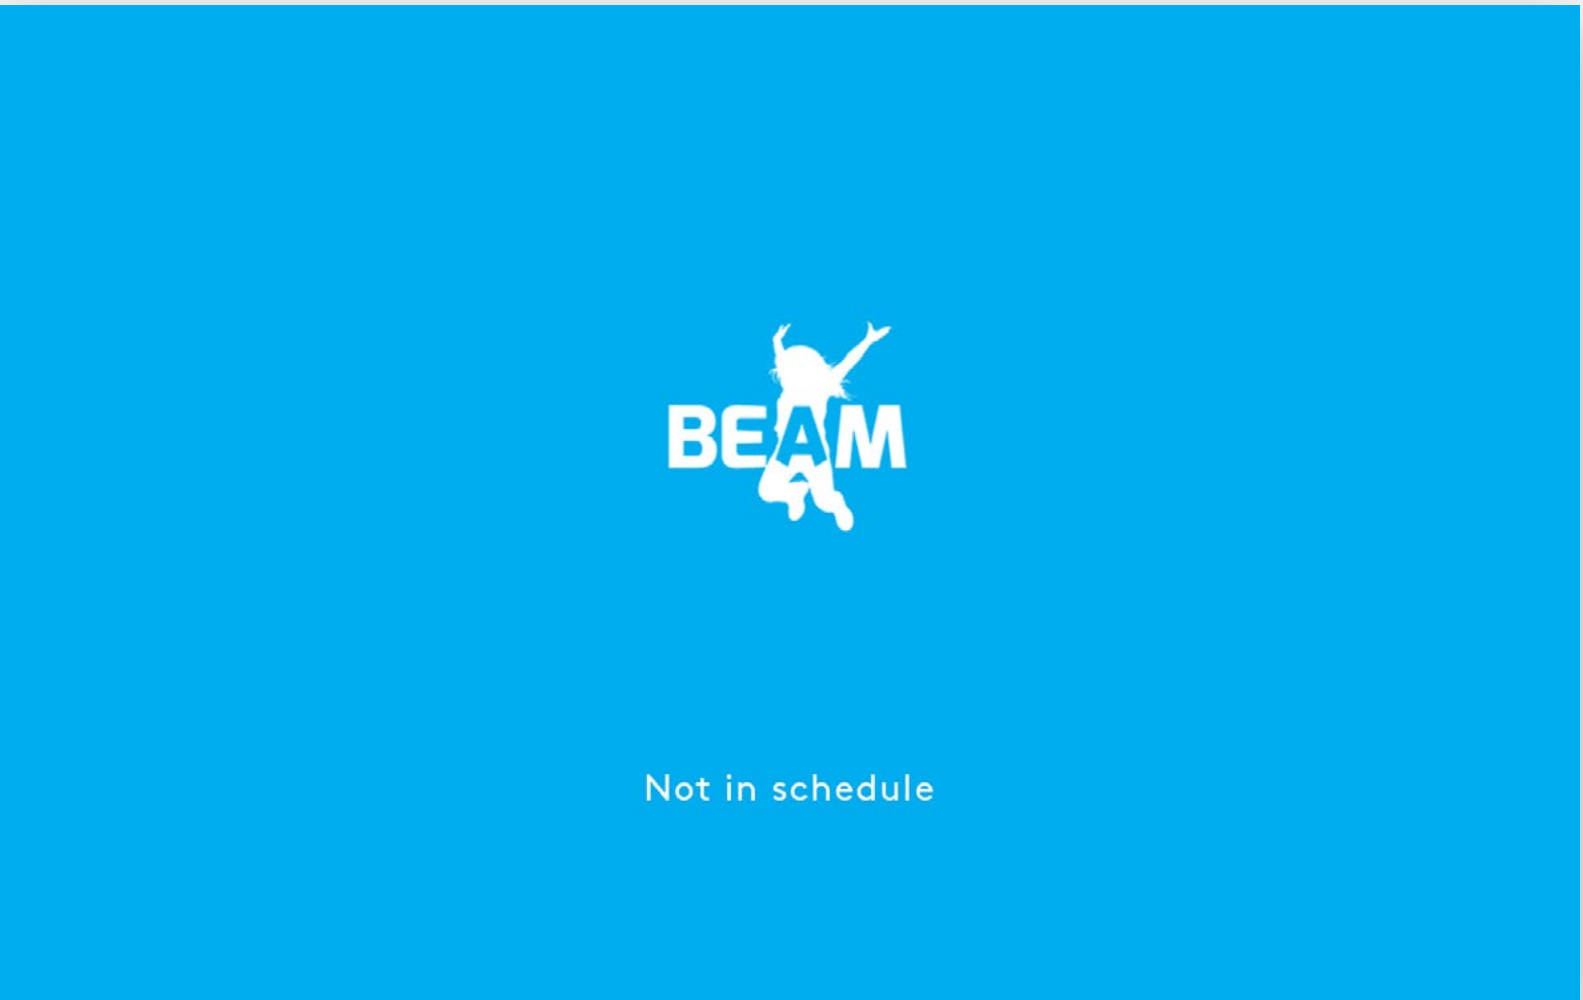

6

Please hold **Ctrl+Q** for a second, which will make the **control area** appear. Please read the **BEAM QuickStart Guide** to learn more about the control area.

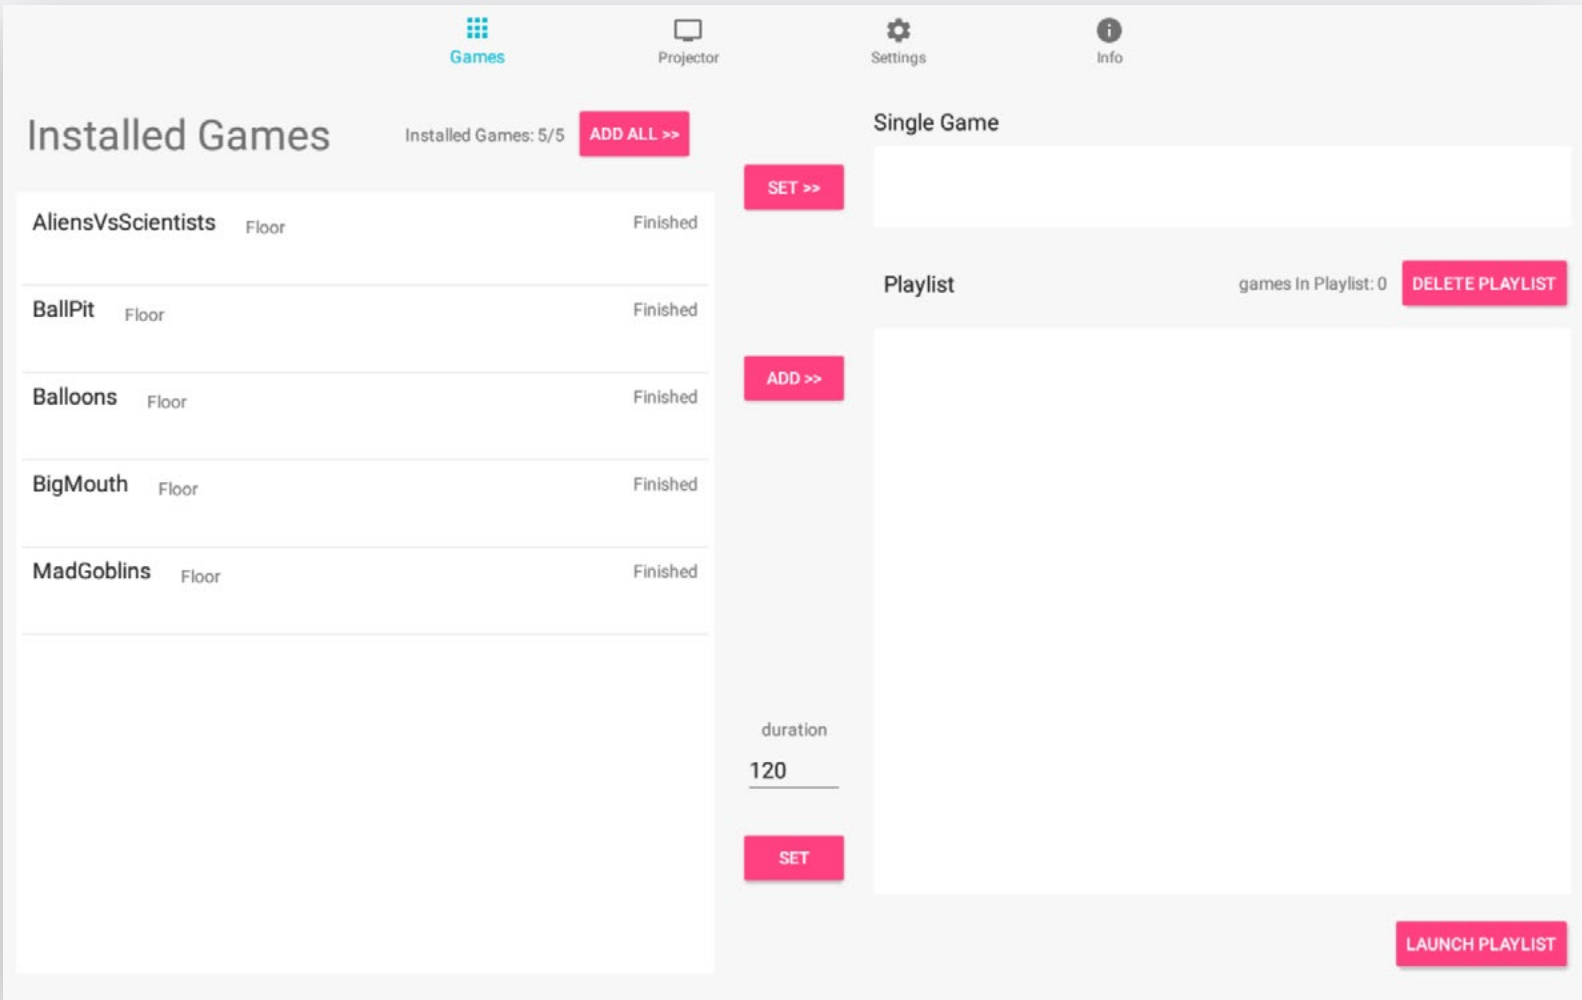

SIGN IN & CONFIGURATION

While in the control area, please hold the **Ctrl** key while typing **iddqd** to access the **maintenance section**.

7


SET UP TEAMVIEWER

Tap the button. A **dialog** will appear. In it, select **Assign**. After, tap the **right button** on the trackpad to return back.

8

SEND TEAMVIEWER ID

Tap this button to share the ID with our support team.

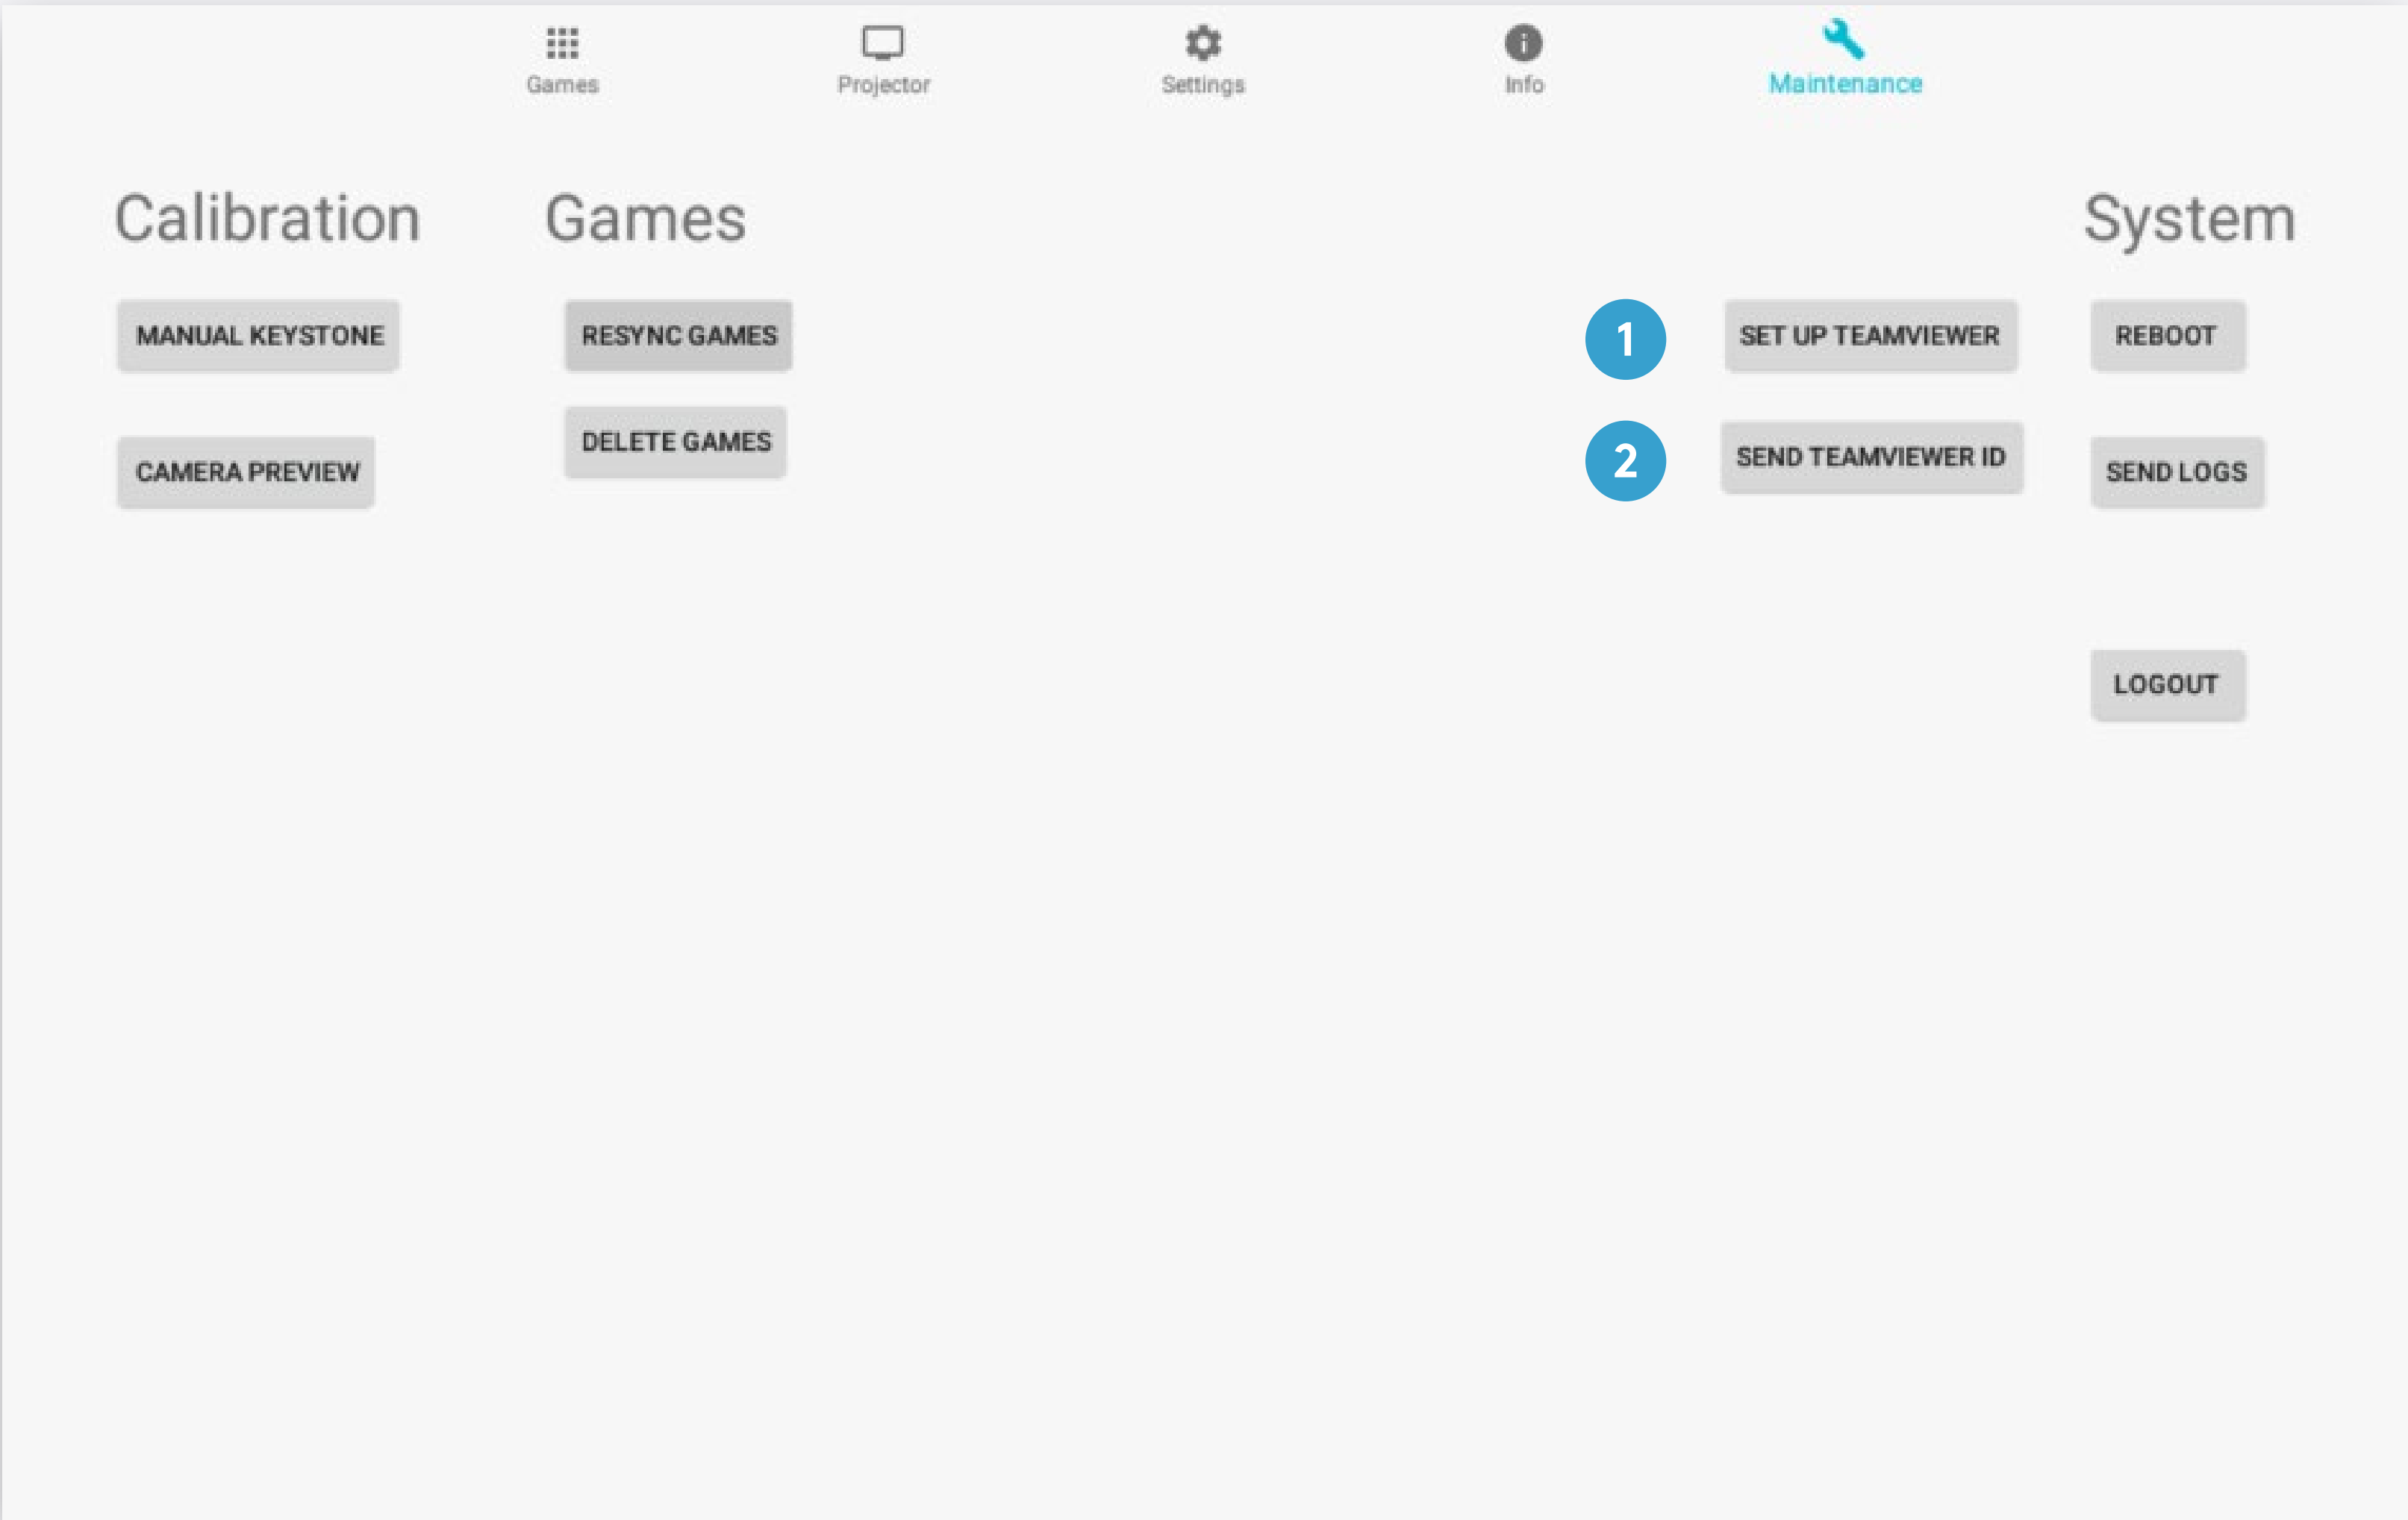


SIGN IN & CONFIGURATION

Now let's make sure the motion sensor camera is capturing the projection area correctly.


9

Tap **CAMERA PREVIEW** in the maintenance section.

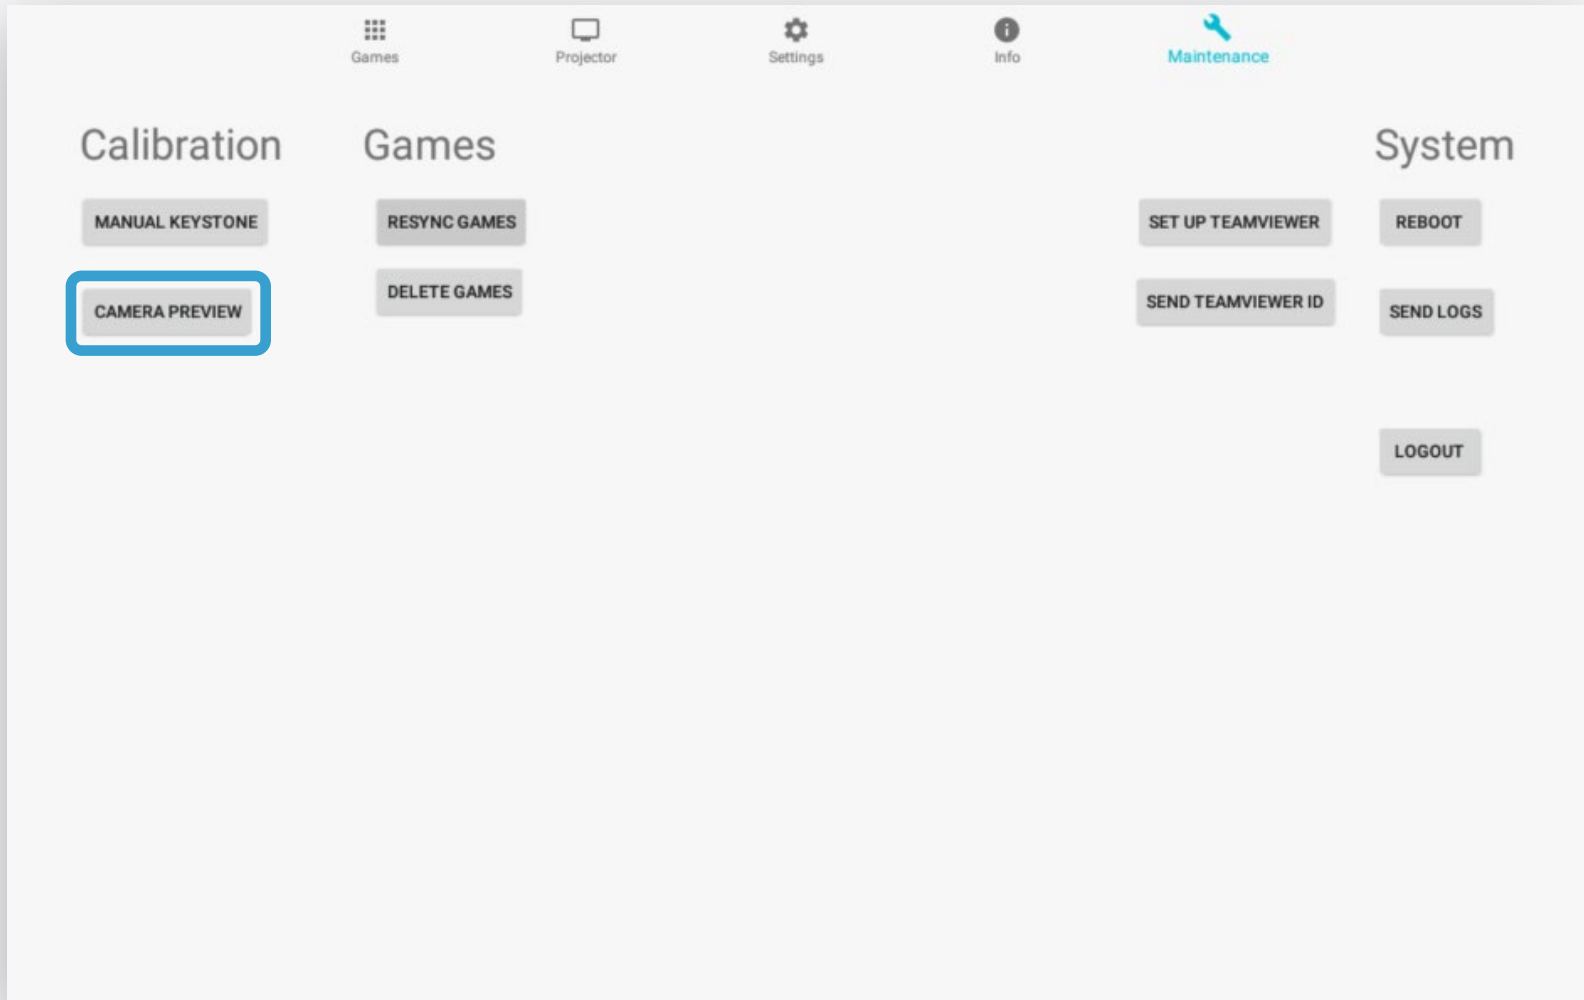

10

The **camera live view** will be projected. Make sure that the **entire projection** area is visible to the camera.

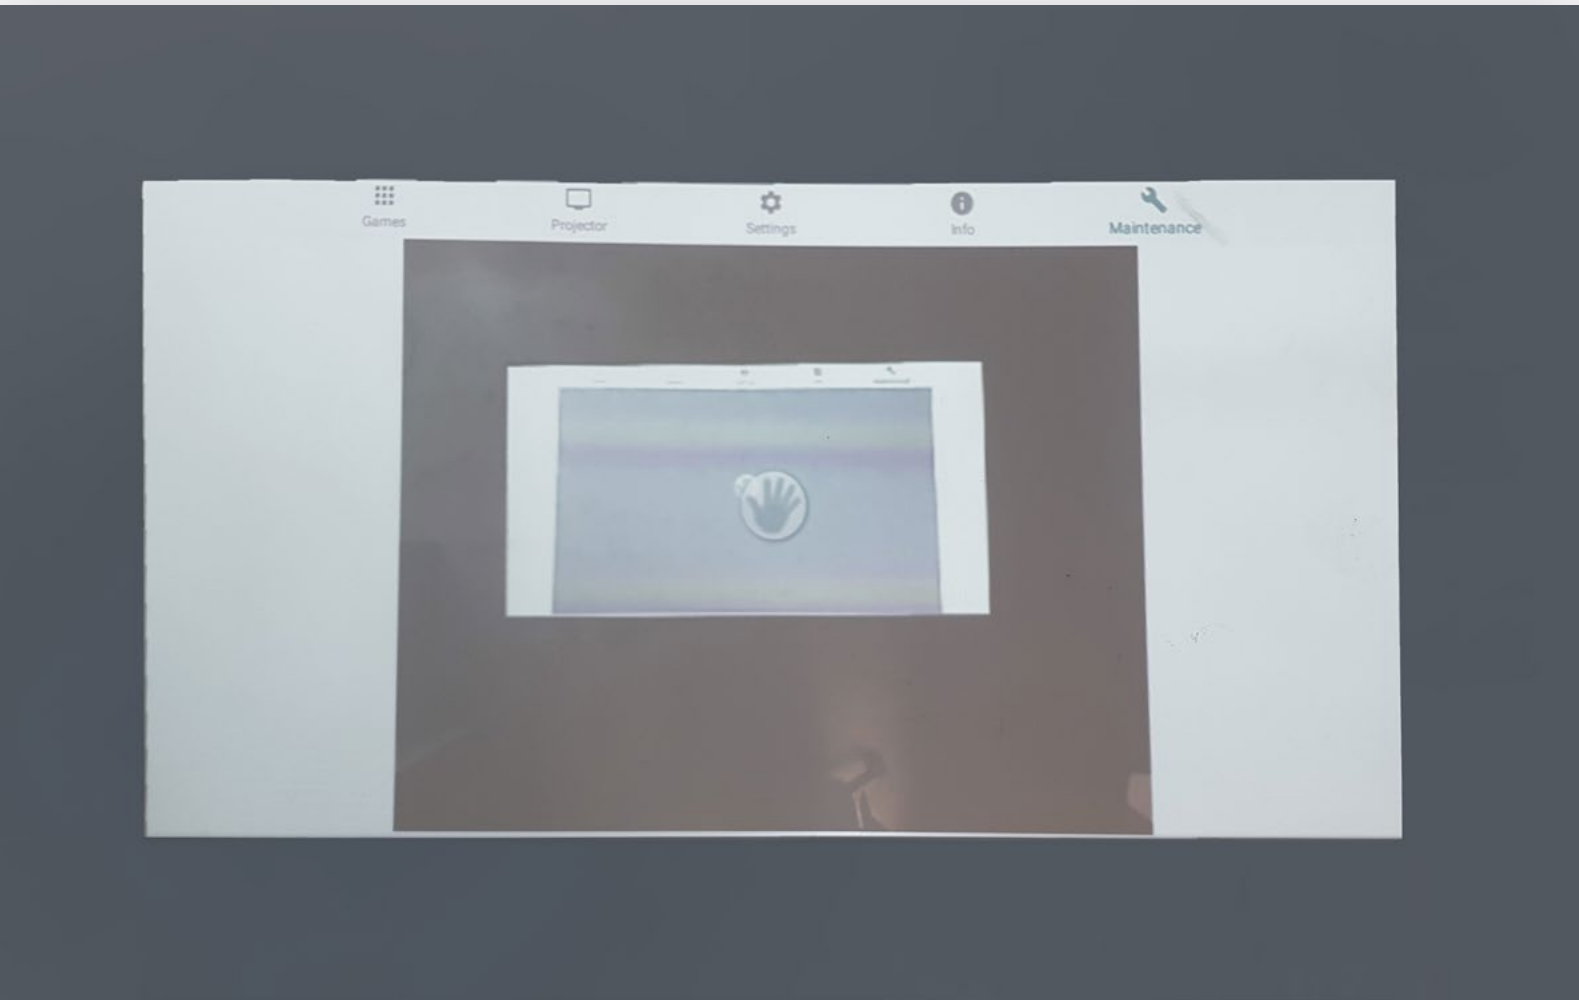

11


Tilt the camera mirror to move the direction if needed. You can also reduce the **projection scale** through the **zoom wheel** on the projector.

Note that **any change to the projection** setup requires **calibrating** it through the **Settings** section.



SIGN IN & CONFIGURATION

Finally, go to the **Settings** section and set the **time zone** to the correct one.

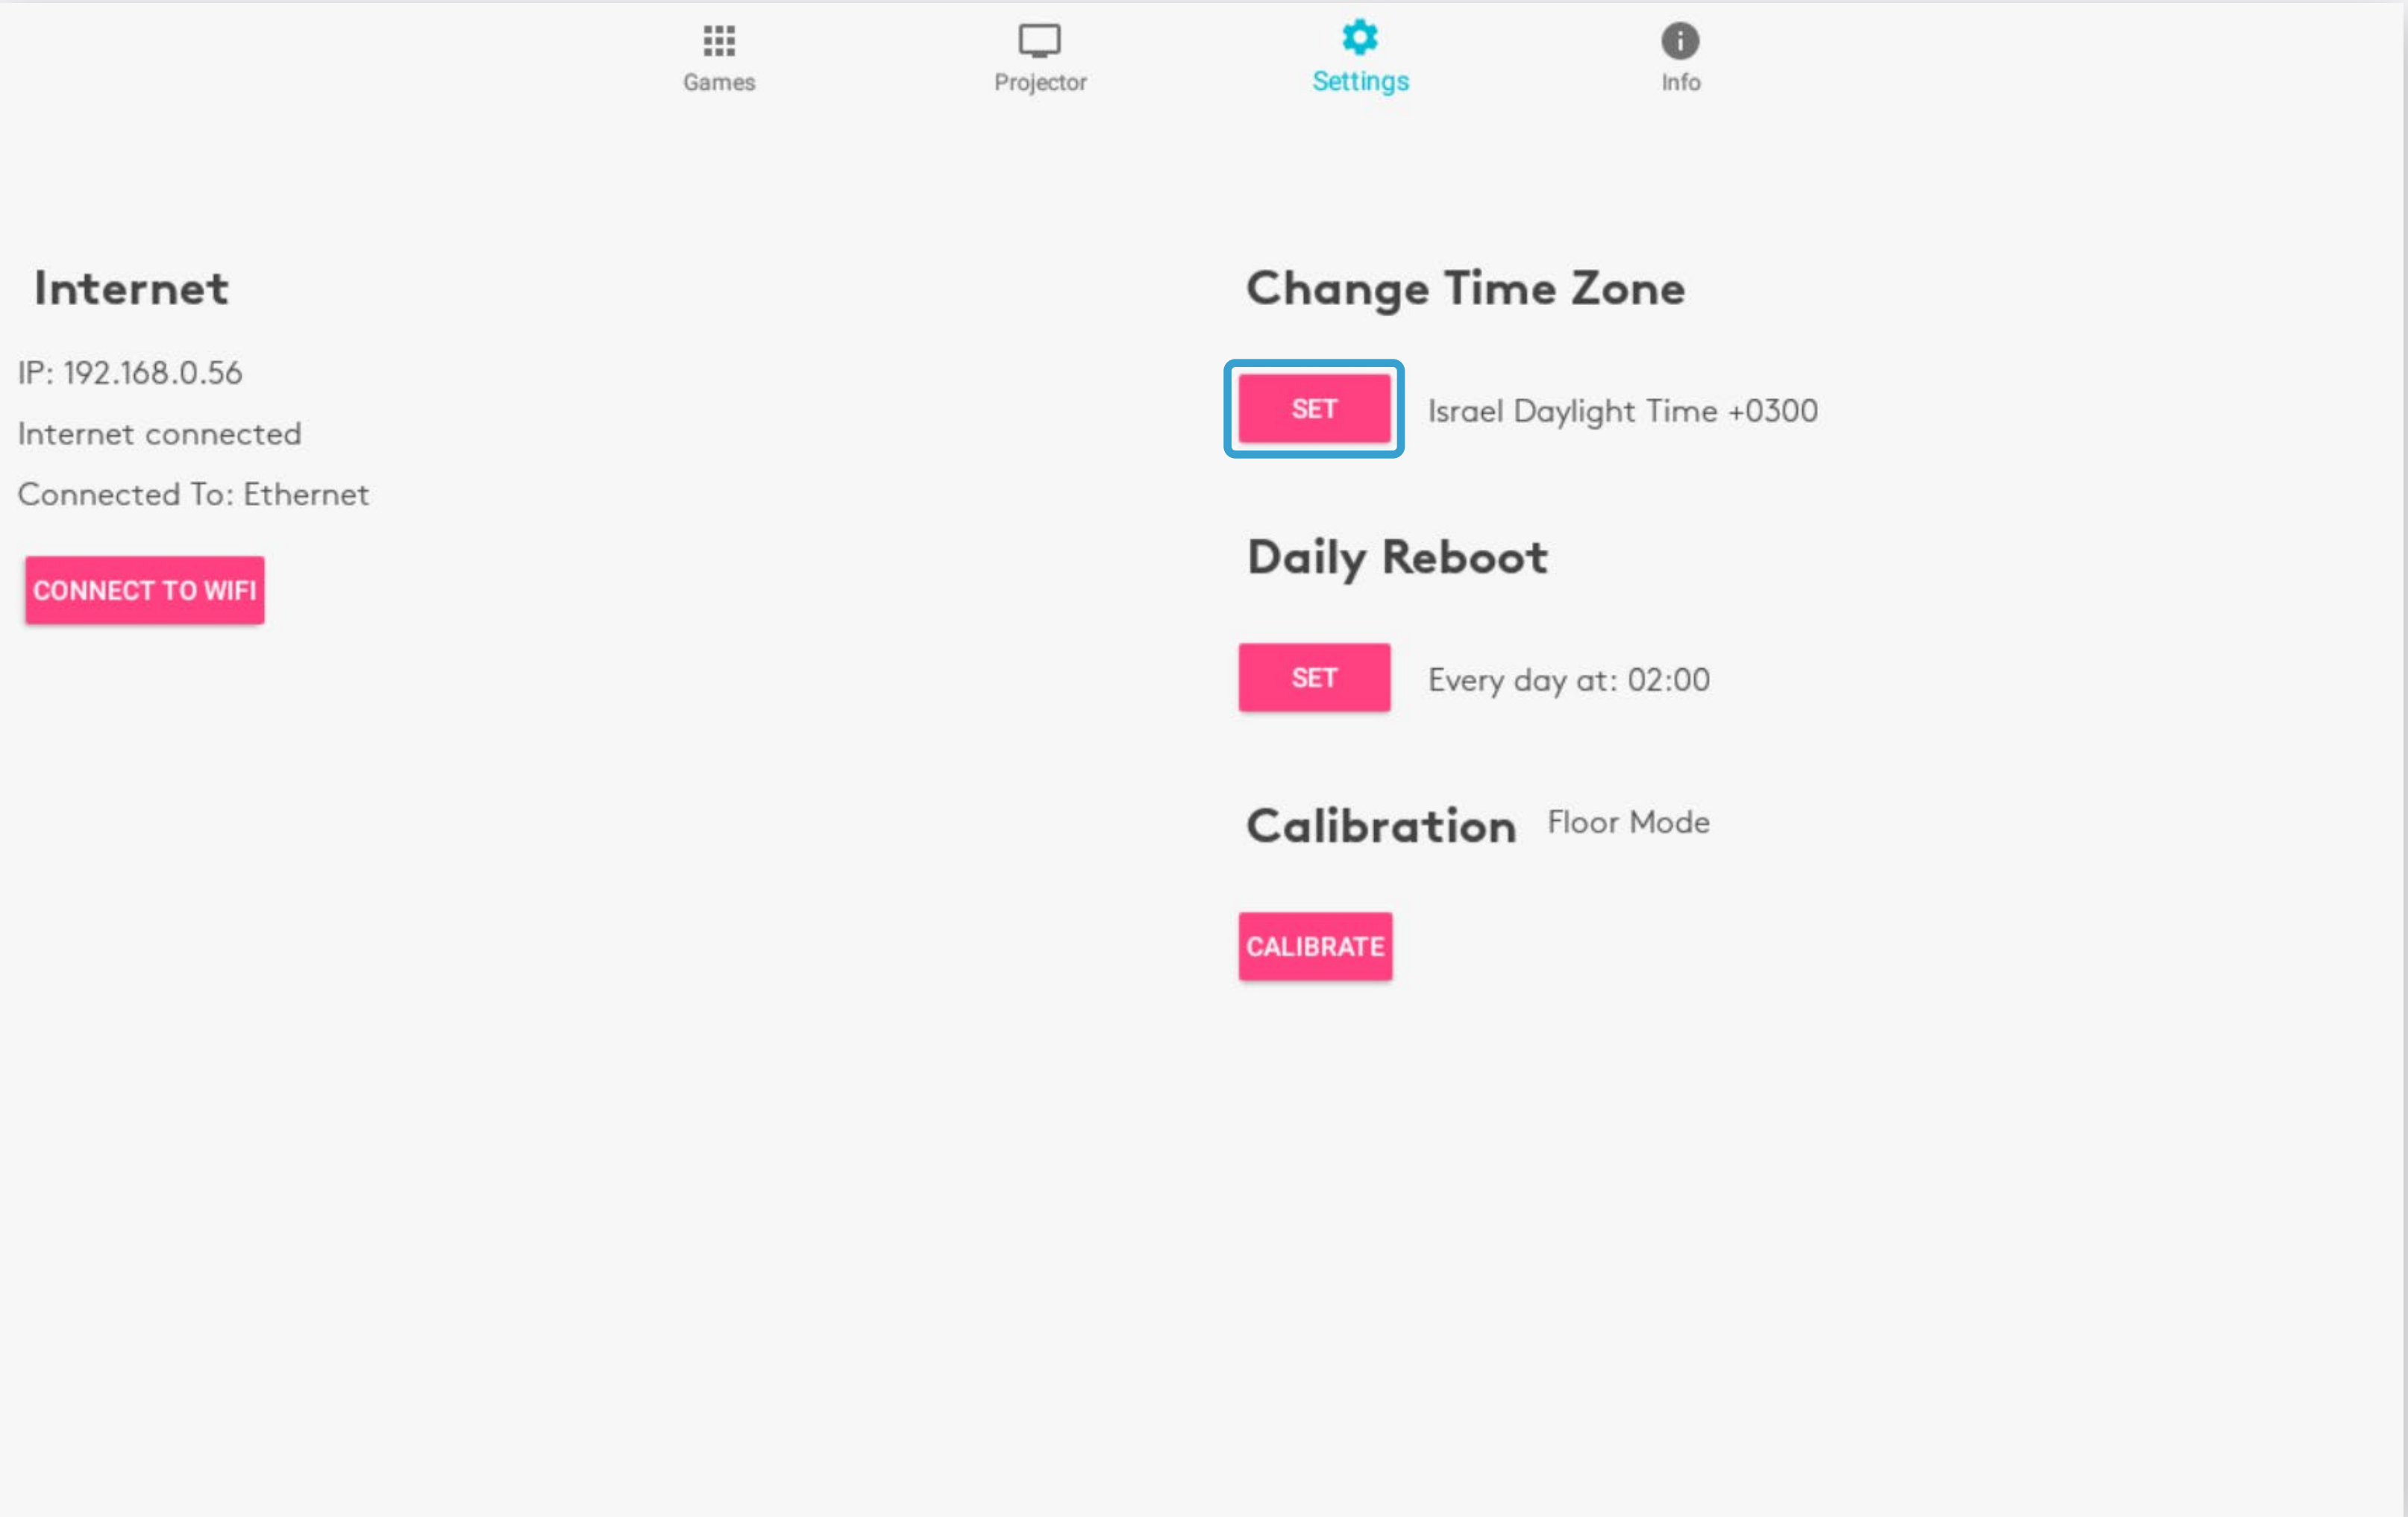

Note

The device will automatically **restart** itself once a new timezone is set.

ENJOY YOUR BEAM!

Please read the **BEAM QuickStart Guide** to learn how to manage and operate your device.

For any issues or questions, please contact us

Email: support.team@eyeclick.com

Website: <https://support.joinbeam.com/open-support-ticket/>

